



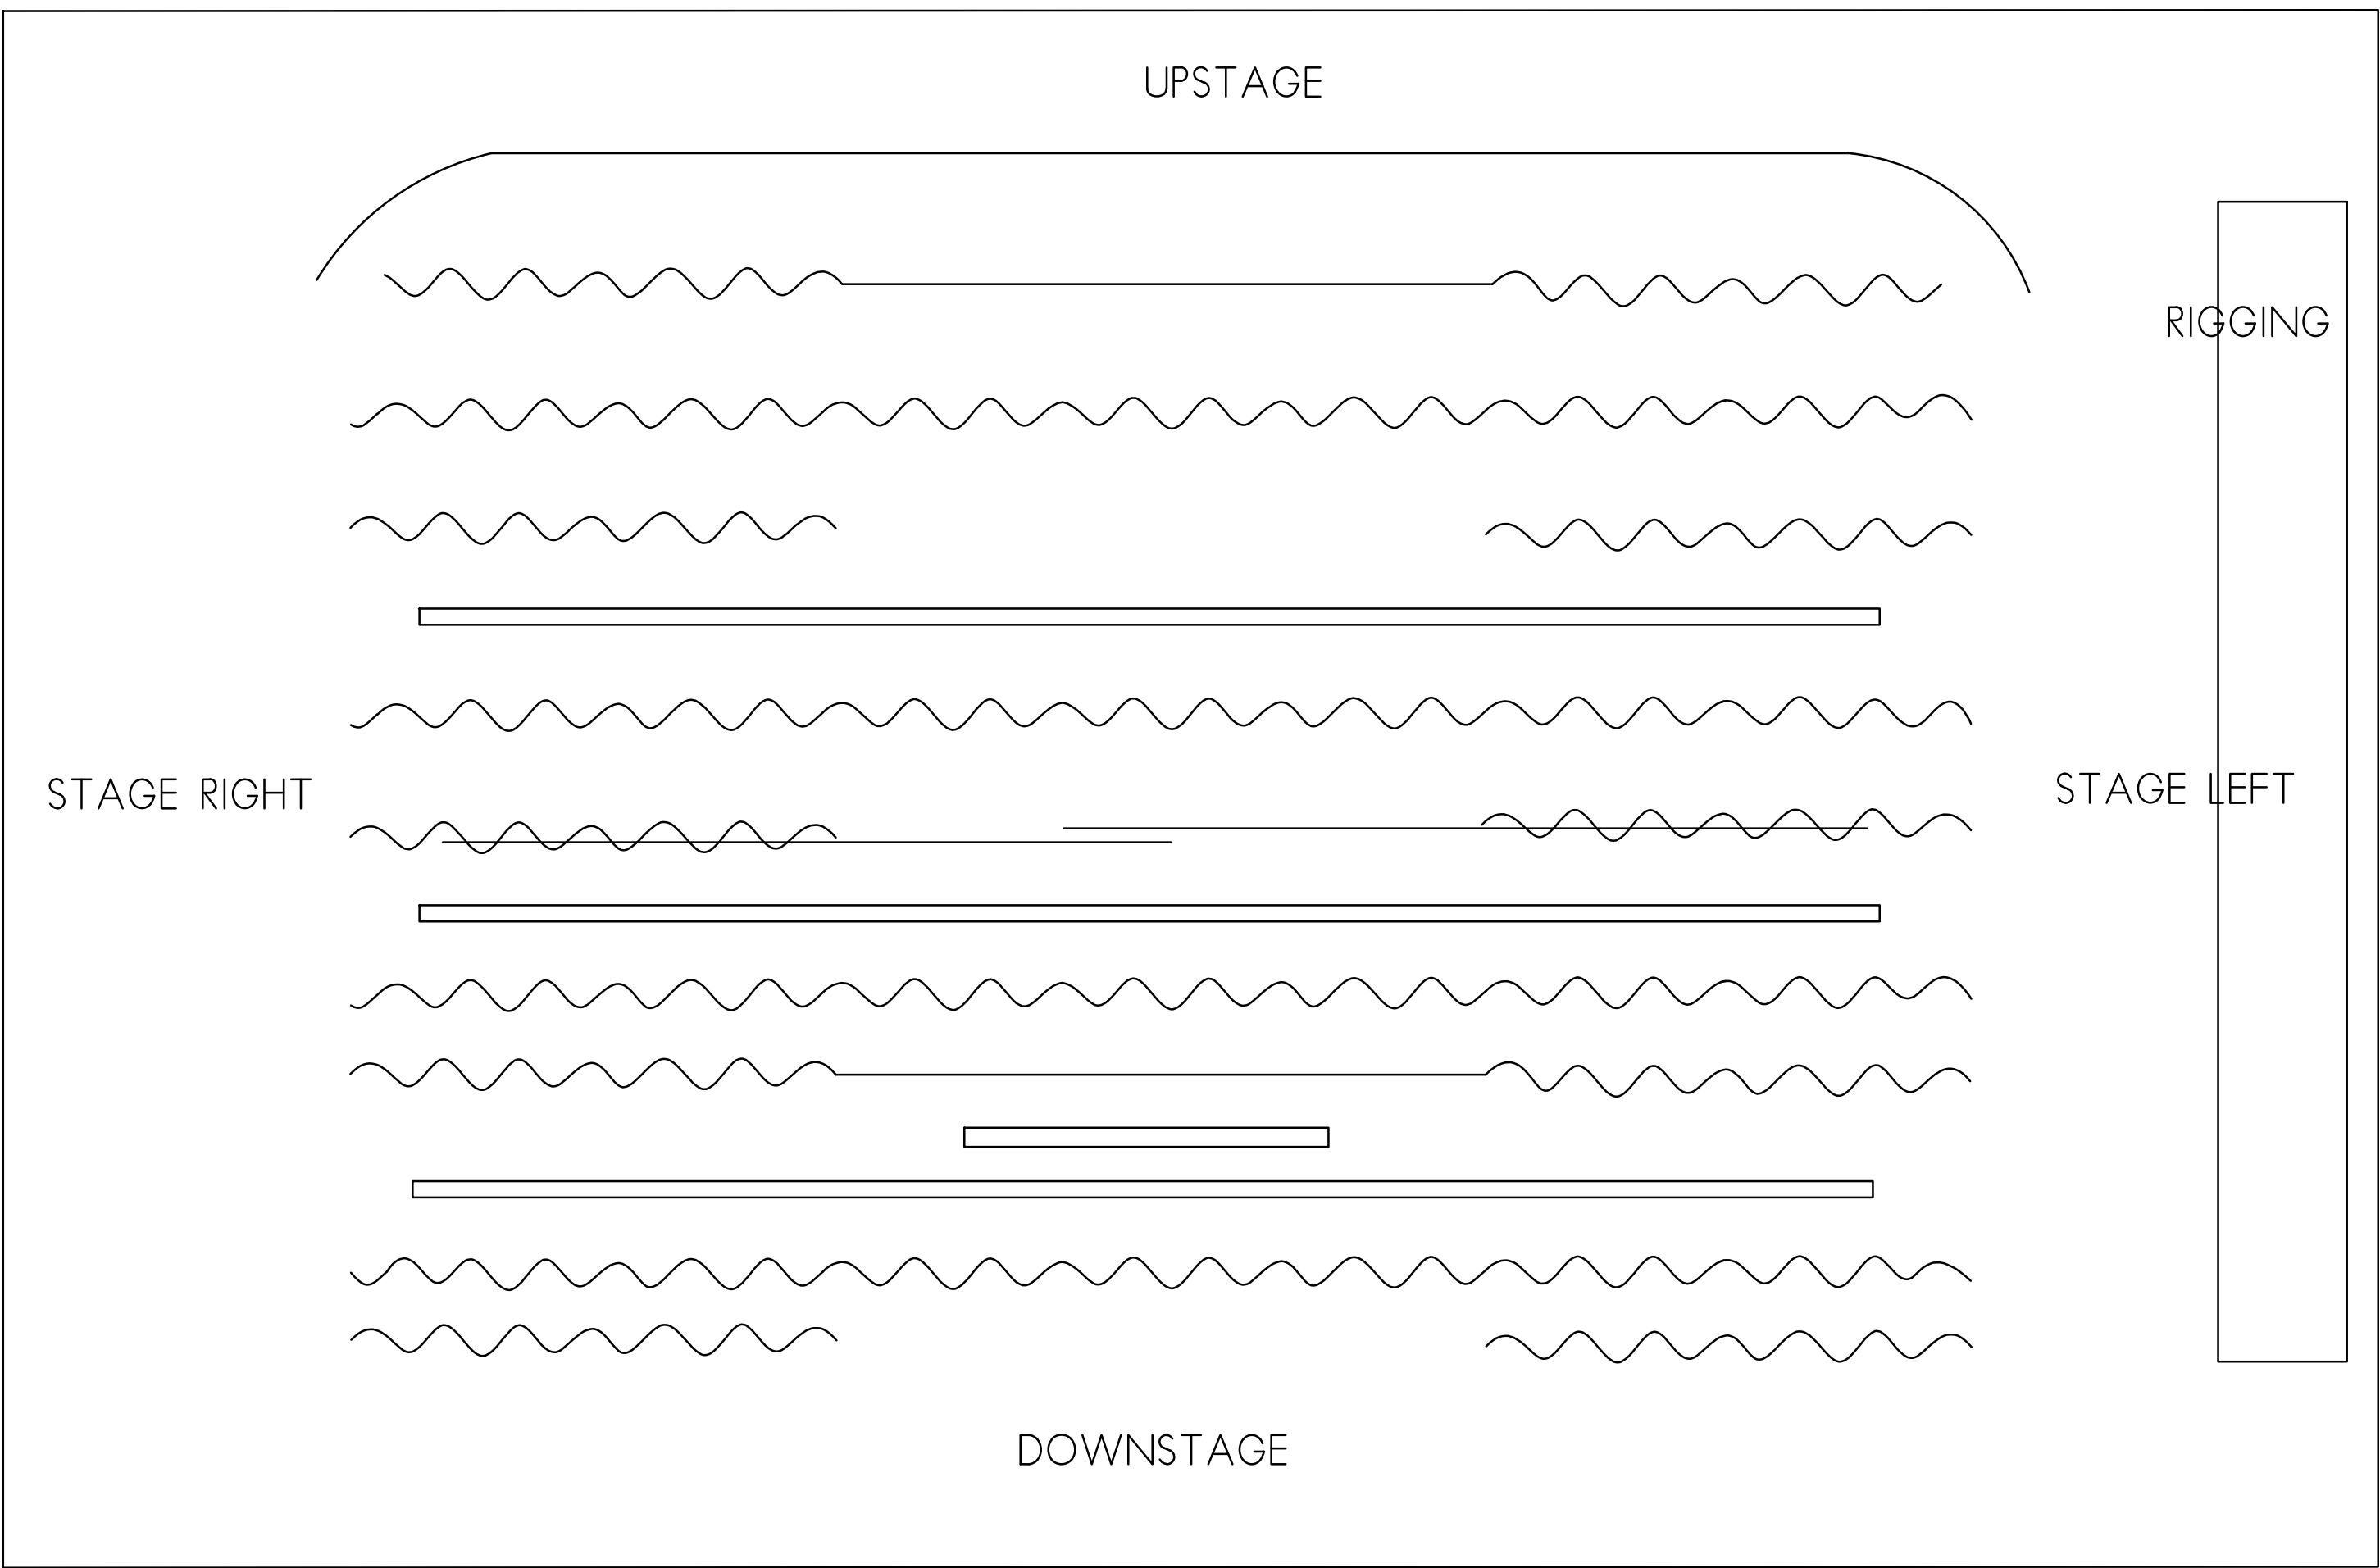

1 EXISTING PLAN
SCALE: NO SCALE

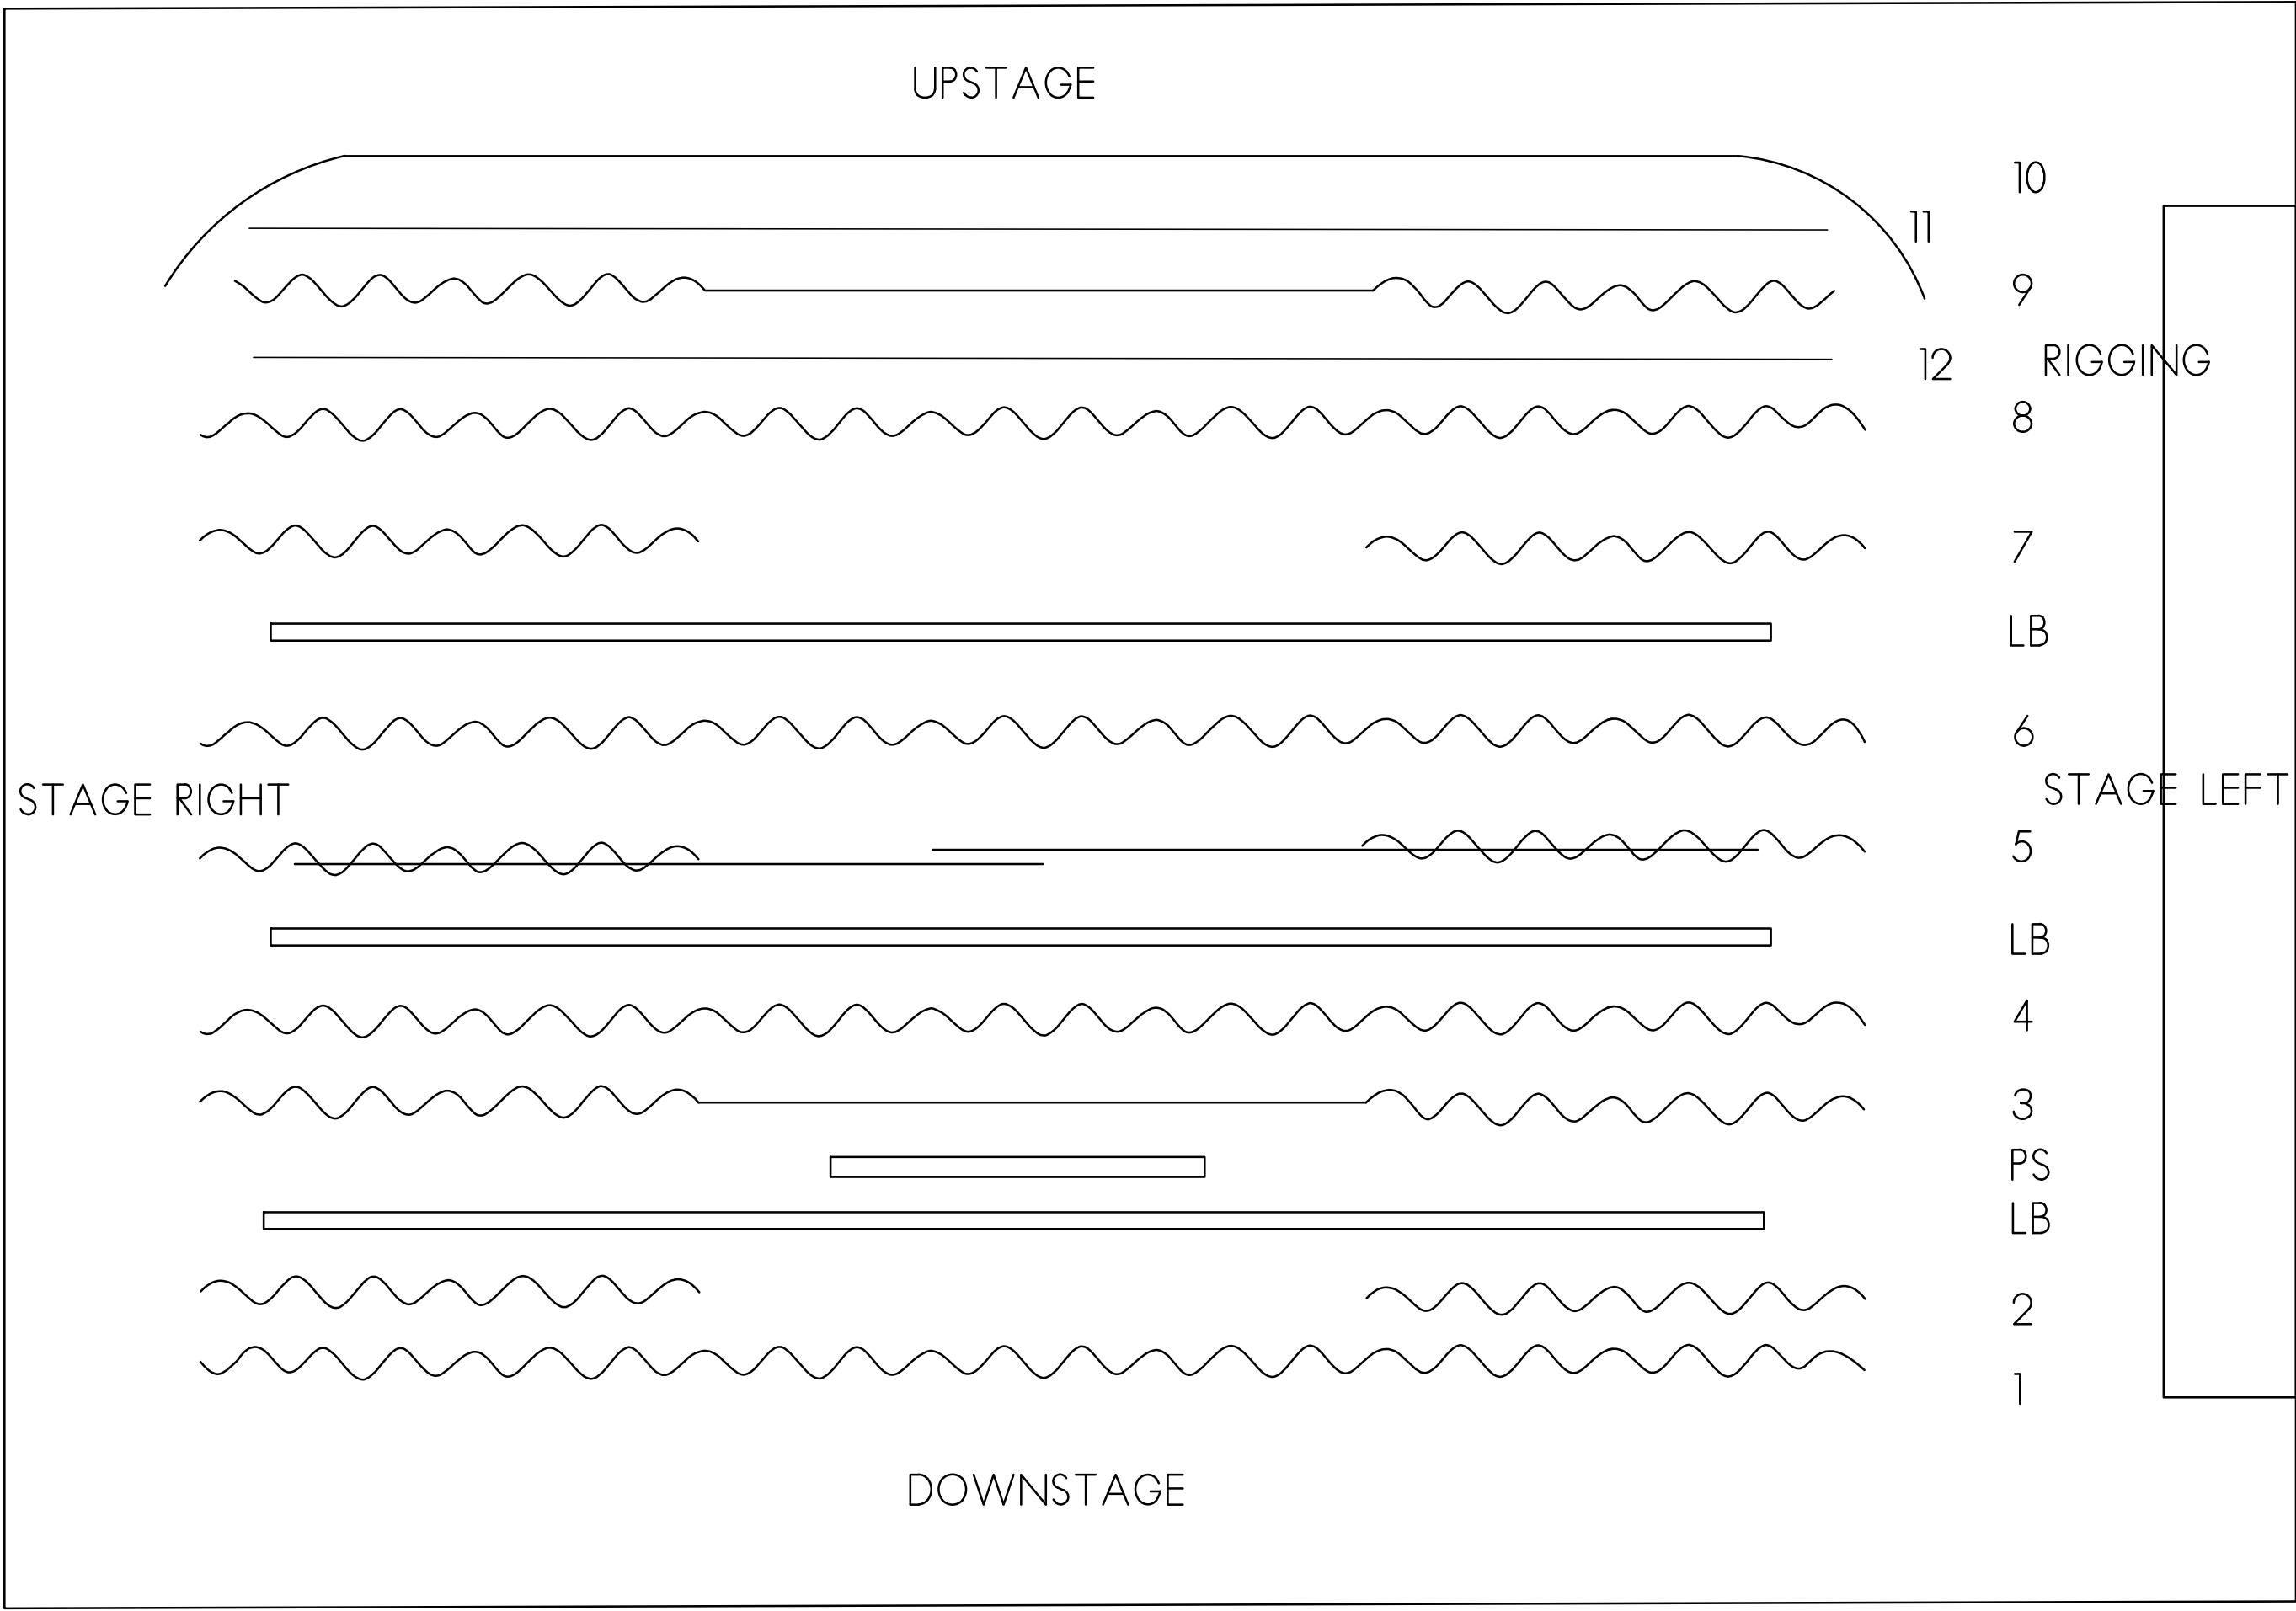

1 NEW PLAN
SCALE: NO SCALE

CURTAIN SCHEDULE									
ITEM #	TYPE OF CURTAIN	HANG TYPE	FABRIC TYPE	QTY	HEIGHT	WIDTH	FULLNESS	COLOR	NOTES
1	MAIN VALANCE	PIPE	CHARISMA	1	9'-9"	47'-0"	50%	1076 PLUM	1,4,6
2	MAIN DRAW	TRACK	CHARISMA	2	18'-0"	25'-0"	50%	1076 PLUM	1,6
3	LEG #1	PIPE	CRESCENT	2	17'-9"	8'-6"	50%	1064 BLACK	1,6
4	BORDER #1	PIPE	CRESCENT	1	8'-0"	45'-0"	50%	1064 BLACK	1,6
5	MID-STAGE DRAW	TRACK	CRESCENT	2	17'-9"	25'-0"	50%	1064 BLACK	1,6
6	BORDER #2	PIPE	CRESCENT	1	8'-0"	45'-0"	50%	1064 BLACK	1,6
7	LEG #2	PIPE	CRESCENT	2	15'-3"	8'-6"	50%	1064 BLACK	1,6
8	BORDER #3	PIPE	CRESCENT	1	8'-0"	45'-0"	50%	1064 BLACK	1,6
9	SCRIM	PIPE	SHARKSTOOTH	1	18'-0"	43'-0"	FLAT	1064 BLACK	1,6
10	CYCLORAMA	PIPE	POLY CYC	1	21'-6"	68'-0"	FLAT	MUSLIN	1,6
11	SCRIM	PIPE	SHARKSTOOTH	1	18'-0"	43'-0"	FLAT	BLACK	2,6
12	SCRIM	PIPE	SHARKSTOOTH	1	18'-0"	43'-0"	FLAT	WHITE	3,6
PS	PROJECTION SCREEN								5
LB	LIGHT BAR								5


2 NEW CURTAIN SCHEDULE
SCALE: NO SCALE

GENERAL SCHEDULE NOTES:


1. REPLACE ALL CURTAINS. REMOVE AND DISCARD EXISTING.
2. BASE BID: BLACK SCRIM CURTAIN ON EXISTING RIGGING. COORDINATE LOCATION WITH OWNER.
3. ALTERNATE #1: ADD WHITE SCRIM ON EXISTING RIGGING. COORDINATE LOCATION WITH OWNER.
4. MAIN VALANCE TO BE INSTALLED DOWNSTAGE FROM MAIN DRAW.
5. TO REMAIN.
6. PROTECT ALL EXISTING FINISHES AND FURNISHINGS FROM CONSTRUCTION WORK.

RIGGING SCHEDULE:

- A. REPLACE TRIM CHAIN WITH LOAD RATED CHAIN AND RE-TERMINATE AIRCRAFT CABLE.
- B. ADD AFTER-MARKET SPREADER PLATES TO ACCOMPLISH ONE PLATE FOR EVERY TWO FEET OF ARBOR.
- C. ADJUST ROPE LOCKS.
- D. PROVIDE TRAINING FOR ALL STAFF THAT USE THE THEATRE AND RIGGING SYSTEM.

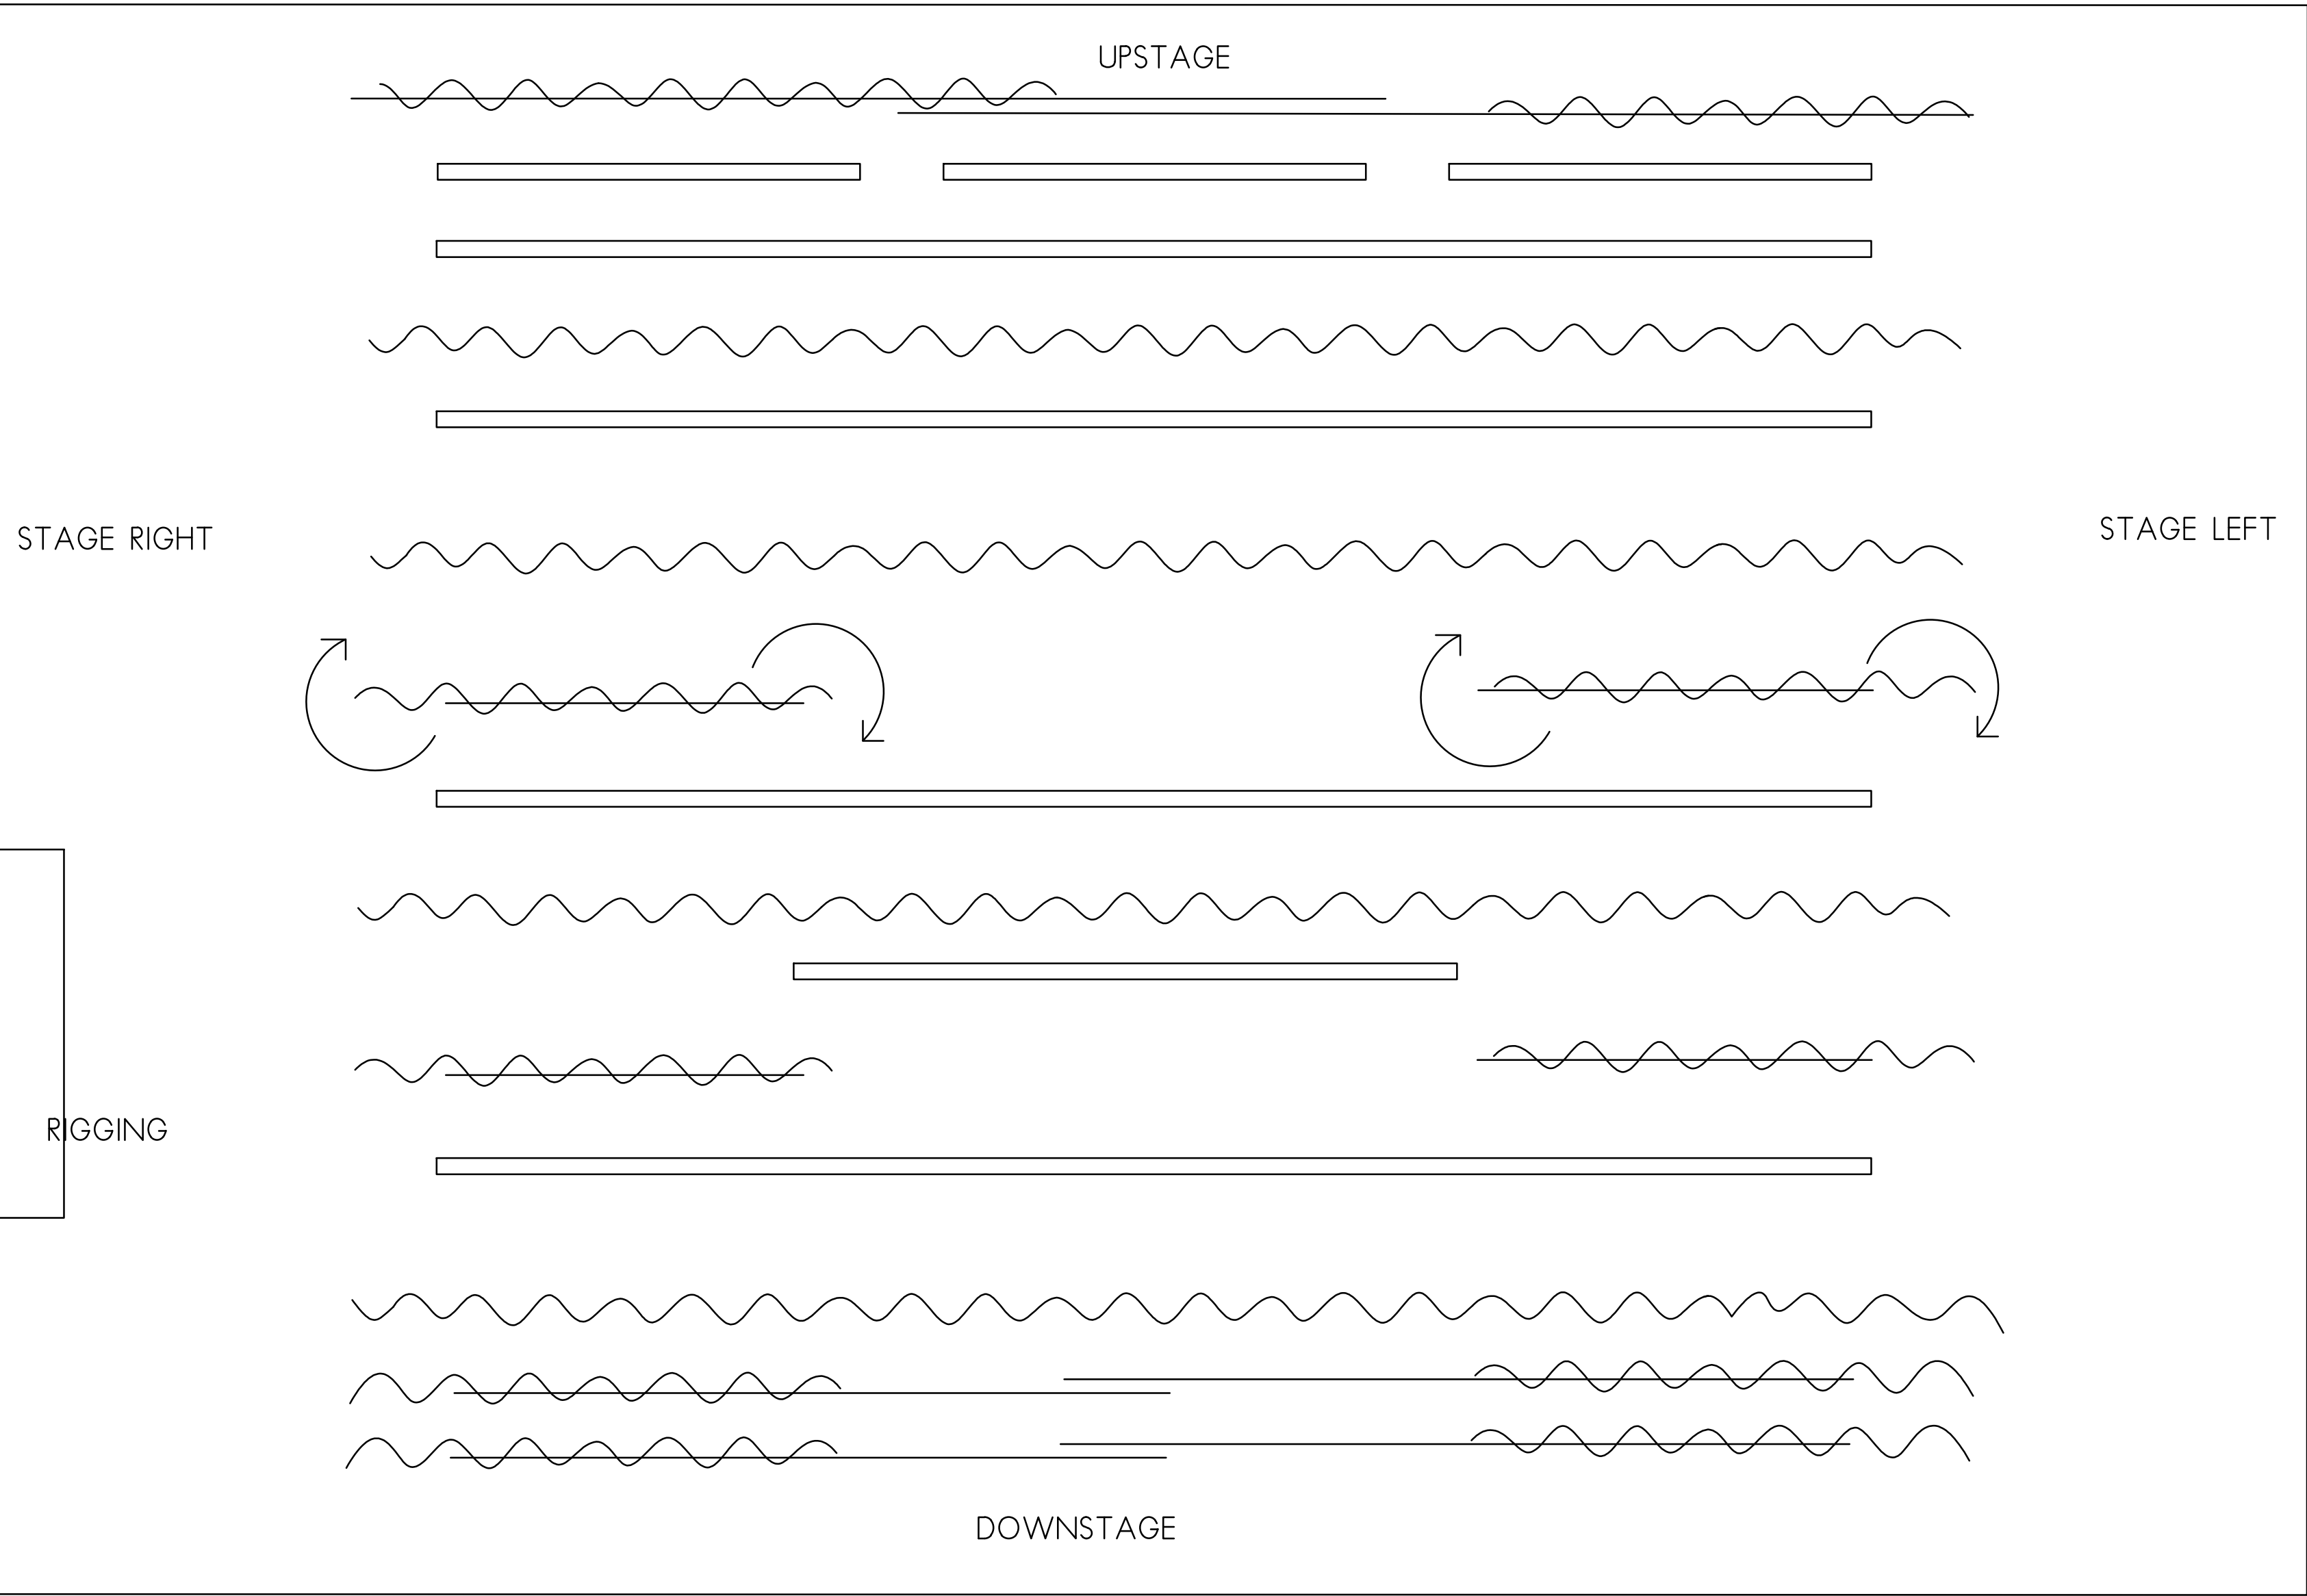

1 EXISTING STAGE PLAN
SCALE: NO SCALE

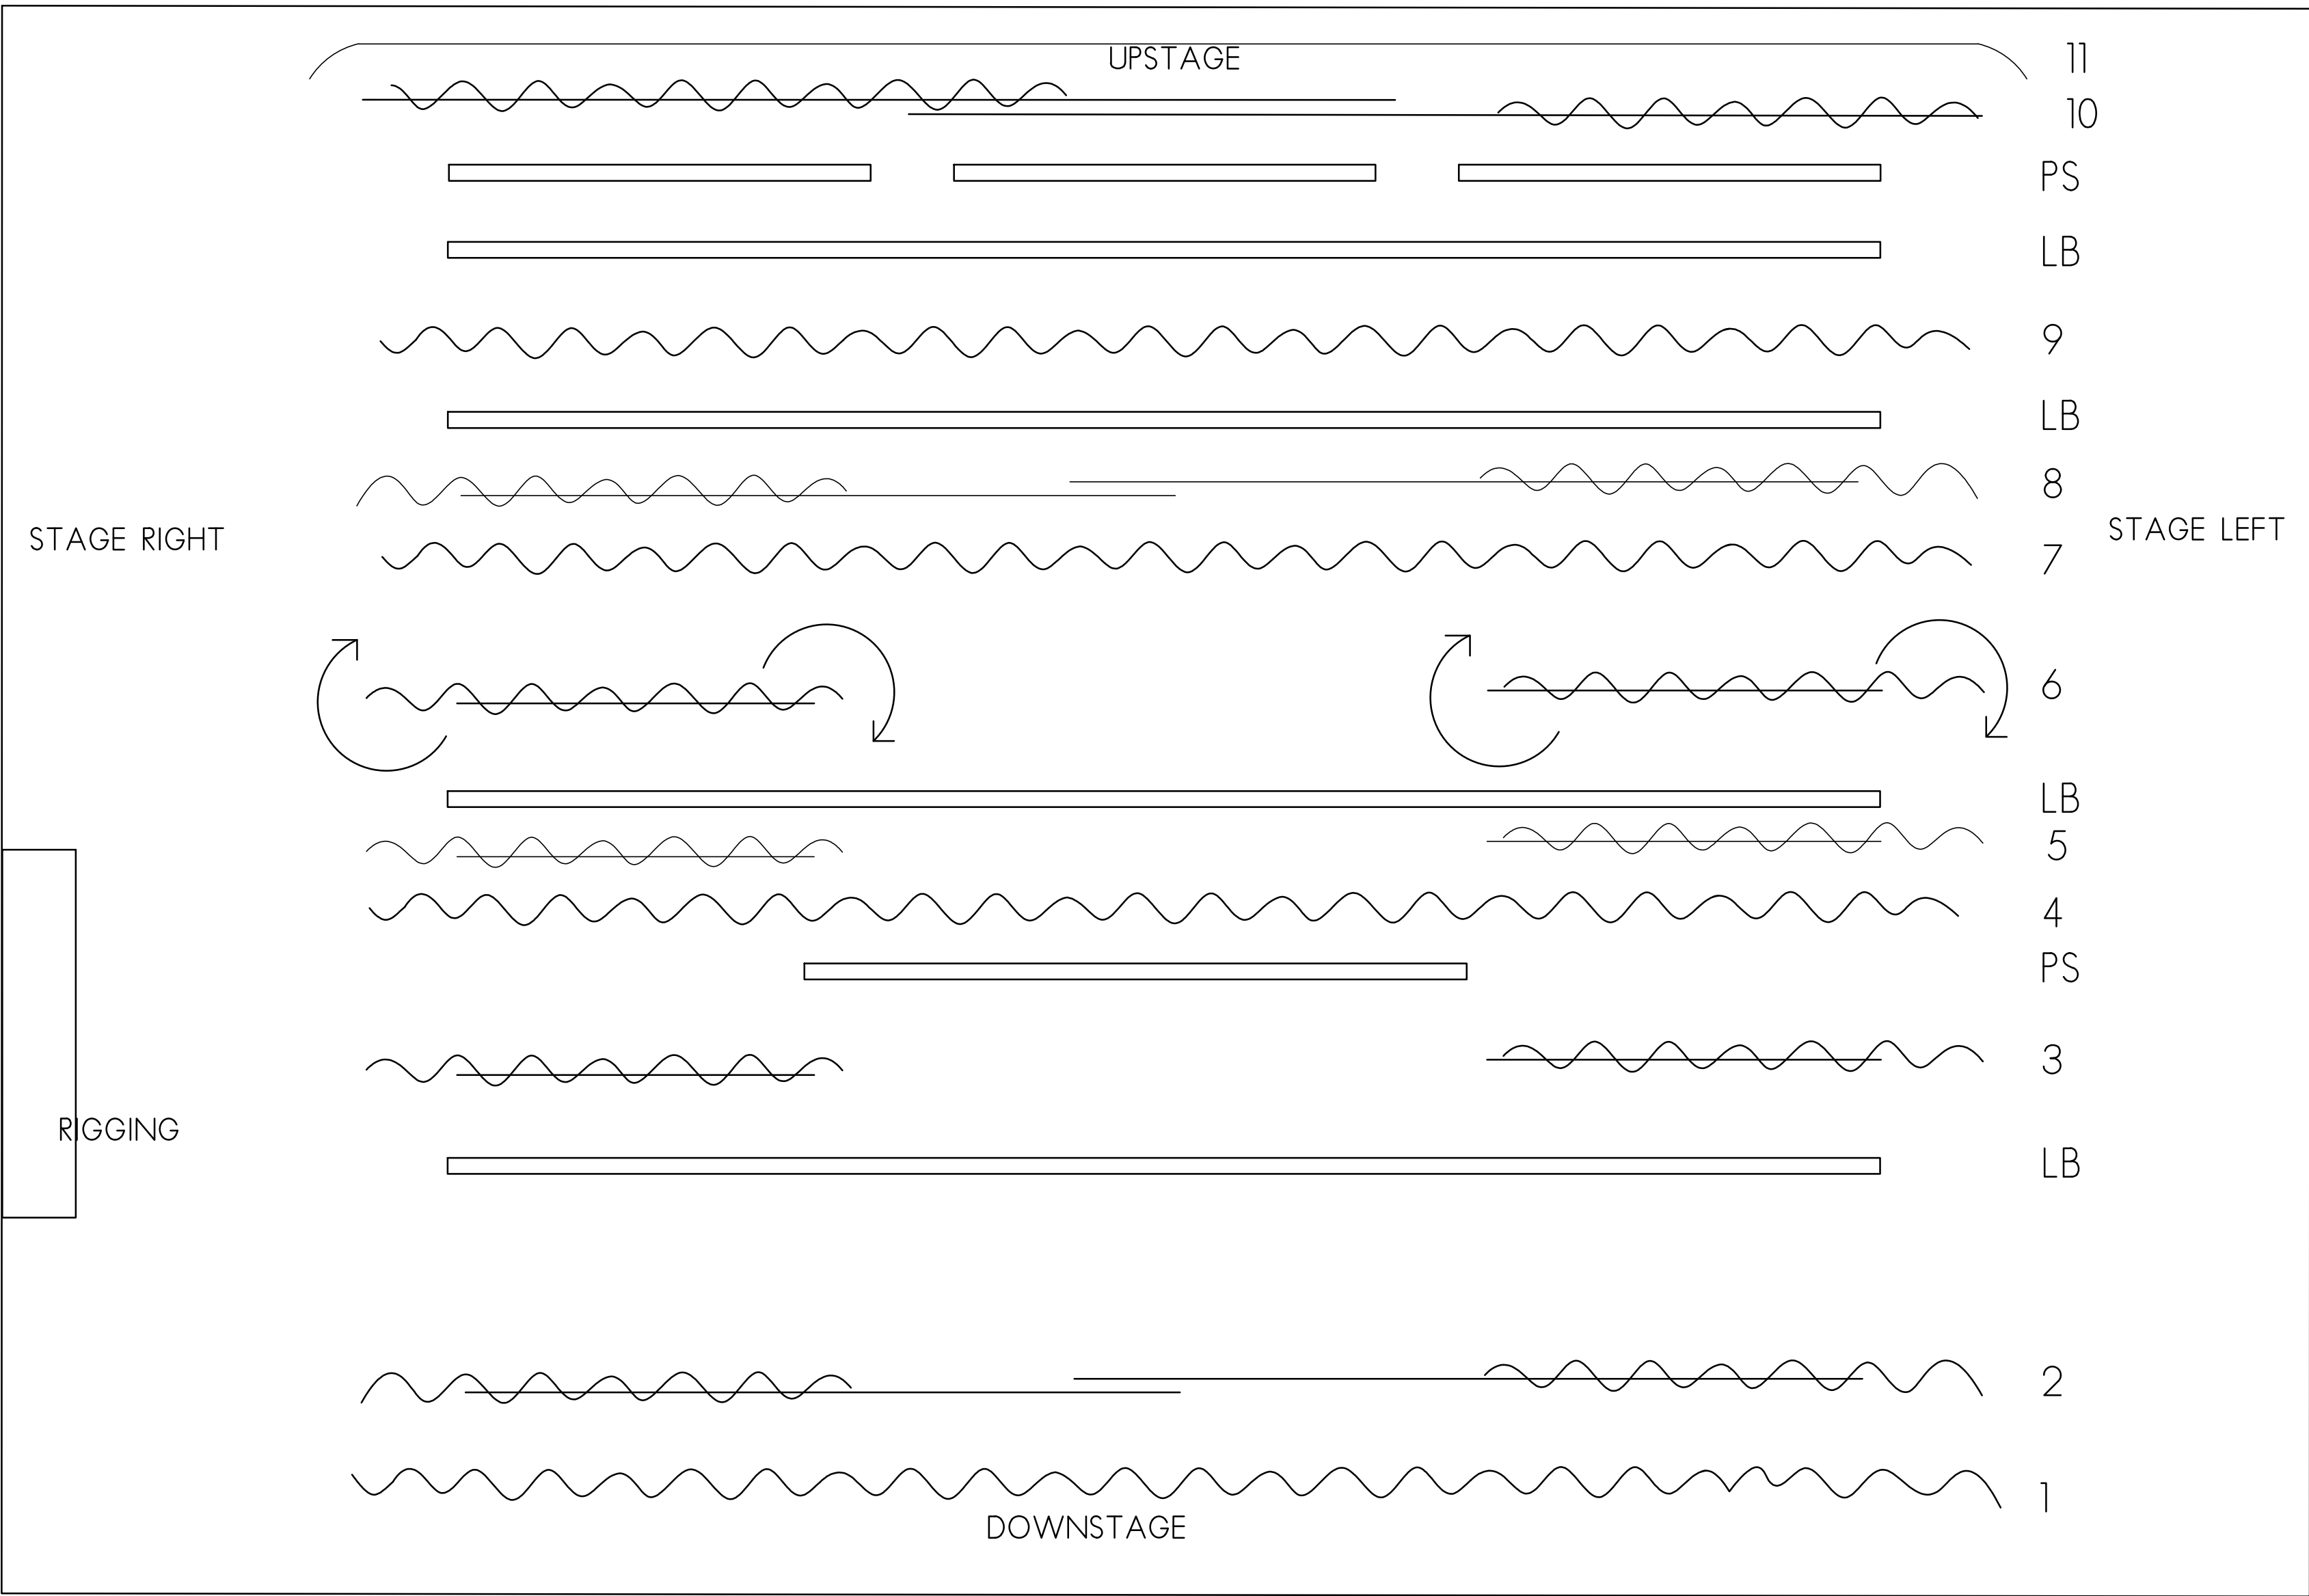

2 NEW STAGE PLAN
SCALE: NO SCALE

CURTAIN SCHEDULE									
ITEM #	TYPE OF CURTAIN	HANG TYPE	FABRIC TYPE	QTY	HEIGHT	WIDTH	FULLNESS	COLOR	NOTES
1	MAIN VALANCE	TACK STRIP	CHARISMA	1	8'-6"	55'-0"	50%	1118 NAVY	1,2,8
2	MAIN DRAW	TRACK	CHARISMA	2	23'-4"	27'-0"	50%	1118 NAVY	1,3,8
3	LEG #1	PIPE	CRESCENT	2	19'-6"	4'-0"	50%	1064 BLACK	1,8
4	BORDER #1	PIPE	CRESCENT	1	6'-8"	55'-0"	50%	1064 BLACK	1,8
5	LEG #2	PIPE	CRESCENT	2	17'-2"	6'-0"	50%	1064 BLACK	1,5,8
6	BORDER #2	PIPE	CRESCENT	1	6'-8"	55'-0"	50%	1064 BLACK	1,8
7	MID-STAGE LEG	PIPE	CRESCENT	2	19'-6"	6'-0"	50%	1064 BLACK	1,8
8	MID-STAGE DRAW	TRACK	CRESCENT	2	16'-8"	26'-0"	50%	1064 BLACK	1,4,8
9	BORDER #3	PIPE	CRESCENT	1	4'-8"	55'-0"	50%	1064 BLACK	1,8
10	REAR-STAGE DRAW	TRACK	CRESCENT	2	16'-8"	26'-0"	50%	1064 BLACK	1,8
11	CYCOLORAMA	TRACK	POLY CYC	1	V.I.F.	V.I.F.	FLAT	MUSLIN	1,6,8
PS	PROJECTION SCREEN								7
LB	LIGHT BAR								7

- GENERAL SCHEDULE NOTES:**
- REPLACE ALL CURTAINS. REMOVE AND DISCARD.
 - RELOCATE MAIN VALANCE TO PROSCENIUM (DOWNSTAGER FROM MAIN DRAW). INSTALL WITH TACK STRIP.
 - REMOVE AND DISCARD (1) SET OF MAIN LEG CURTAINS. RIGGING TO REMAIN.
 - BASE BID: ADD MID-STAGE DRAW CURTAINS. INSTALL ON EXISTING RIGGING. COORDINATE LOCATION WITH OWNER.
 - BASE BID: ADD MID-STAGE LEG CURTAINS. INSTALL ON EXISTING RIGGING. COORDINATE LOCATION WITH OWNER.
 - BASE BID: ADD CYCLORAMA. INSTALL ON EXISTING RIGGING IF ONSITE. ADD TO BID IF NEW RIGGING IS NEEDED.
 - TO REMAIN.
 - PROTECT ALL EXISTING FINISHES AND FURNISHINGS FROM CONSTRUCTION WORK.

- RIGGING SCHEDULE:**
- REPLACE TRIM CHAIN WITH LOAD RATED CHAIN AND RE-TERMINATE AIRCRAFT CABLE.
 - PROVIDE TRAINING FOR ALL STAFF THAT USE THE THEATRE AND RIGGING SYSTEM.

3 NEW CURTAIN SCHEDULE
SCALE: NO SCALE


FLINN MIDDLE SCHOOL
STAGE PLANS AND CURTAIN SCHEDULE

SCALE: NO SCALE

A PROJECT FOR ROCKFORD PUBLIC SCHOOL DISTRICT 205
THEATER RIGGING/STAGE CURTAINS
ROCKFORD, ILLINOIS

COPYRIGHT 2017
All drawn and written information
appearing herein shall not be
reproduced, copied, or otherwise
used without the written consent of
Larson & Darby Group

DATE: 3-13-2017	ISSUED FOR:	DATE
PROJECT NUMBER 26160	DRAWN JAW	
SHEET NUMBER 12.1	APPROVED CA	

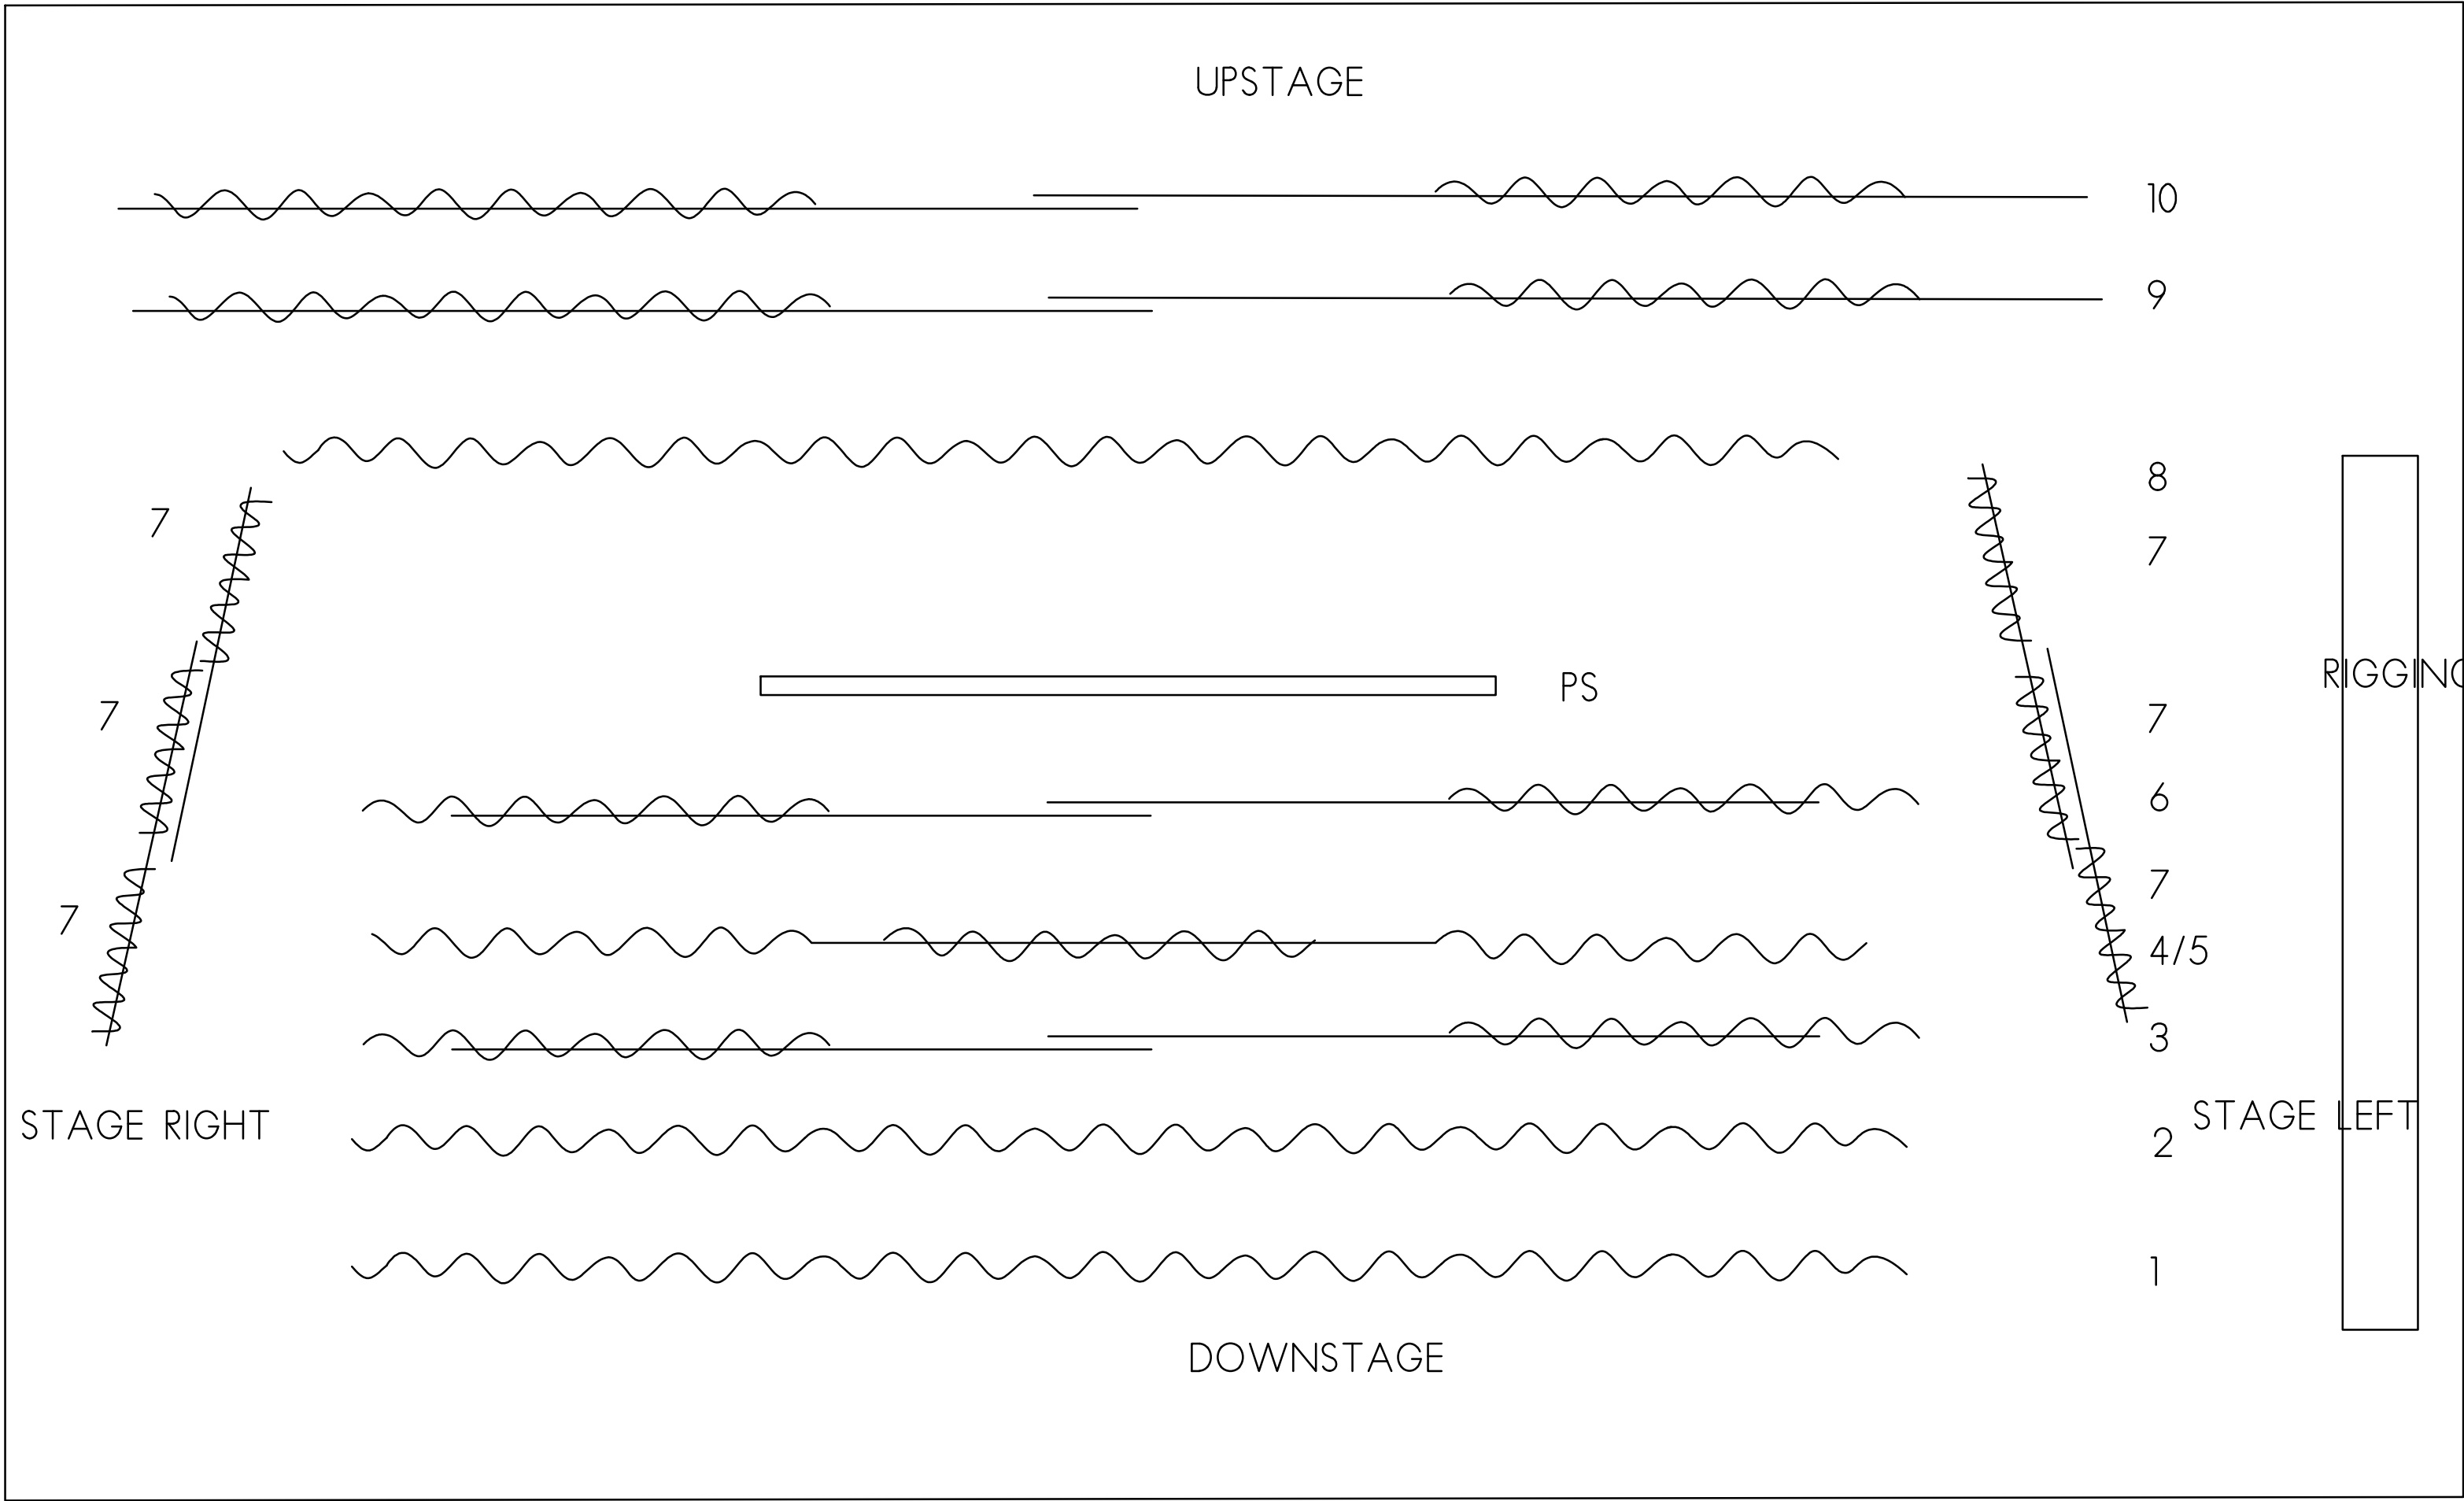

1 STAGE PLAN
SCALE: NO SCALE

CURTAIN SCHEDULE									
ITEM #	TYPE OF CURTAIN	HANG TYPE	FABRIC TYPE	QTY	HEIGHT	WIDTH	FULLNESS	COLOR	NOTES
1	MAIN VALANCE	TACK STRIP	CHARISMA	1	-	-	50%	1064 BLACK	1,3
2	TEASER	PIPE	CHARISMA	1	-	-	50%	1064 BLACK	1,3
3	MAIN DRAW	TRACK	CHARISMA	2	-	-	50%	1064 BLACK	1,3
4	LEG #1	PIPE	CRESCENT	2	-	-	50%	1064 BLACK	1,3
5	BORDER #1	PIPE	CRESCENT	1	-	-	50%	1064 BLACK	1,3
6	MID-STAGE DRAW	TRACK	CRESCENT	2	-	-	50%	1064 BLACK	1,3
7	SIDE TAB (GERMANS)	PIPE	CRESCENT	6	-	-	50%	1064 BLACK	1,3
8	BORDER #2	PIPE	CRESCENT	1	-	-	50%	1064 BLACK	1,3
9	REAR-STAGE DRAW	TRACK	CRESCENT	2	-	-	50%	1064 BLACK	1,3
10	CYCLORAMA	TRACK	POLY CYC	1	-	-	FLAT	MUSLIN	1,3
PS	PROJECTION SCREEN	-	-	-	-	-	-	-	2

GENERAL SCHEDULE NOTES:

1. REPLACE ALL CURTAINS. REMOVE AND DISCARD EXISTING BIDDERS WILL NEED TO FIELD VERIFY THE HEIGHT AND WIDTH OF EXISTING CURTAINS TO DETERMINE SIZES FOR NEW CURTAINS.
2. ANY LIGHTING AS WELL AS PROJECTION SCREEN ARE TO REMAIN.
3. PROTECT ALL EXISTING FINISHES AND FURNISHINGS FROM CONSTRUCTION WORK.


RIGGING SCHEDULE:


- A. REPLACE ALL DEAD HUNG RIGGING COMPONENTS WITH LOAD RATED HARDWARE.
- B. PROVIDE TRAINING FOR ALL STAFF THAT USE THE THEATER AND RIGGING SYSTEM.

2 NEW CURTAIN SCHEDULE
SCALE: NO SCALE

KENNEDY MIDDLE SCHOOL
STAGE PLAN AND CURTAIN SCHEDULE

SCALE: NO SCALE



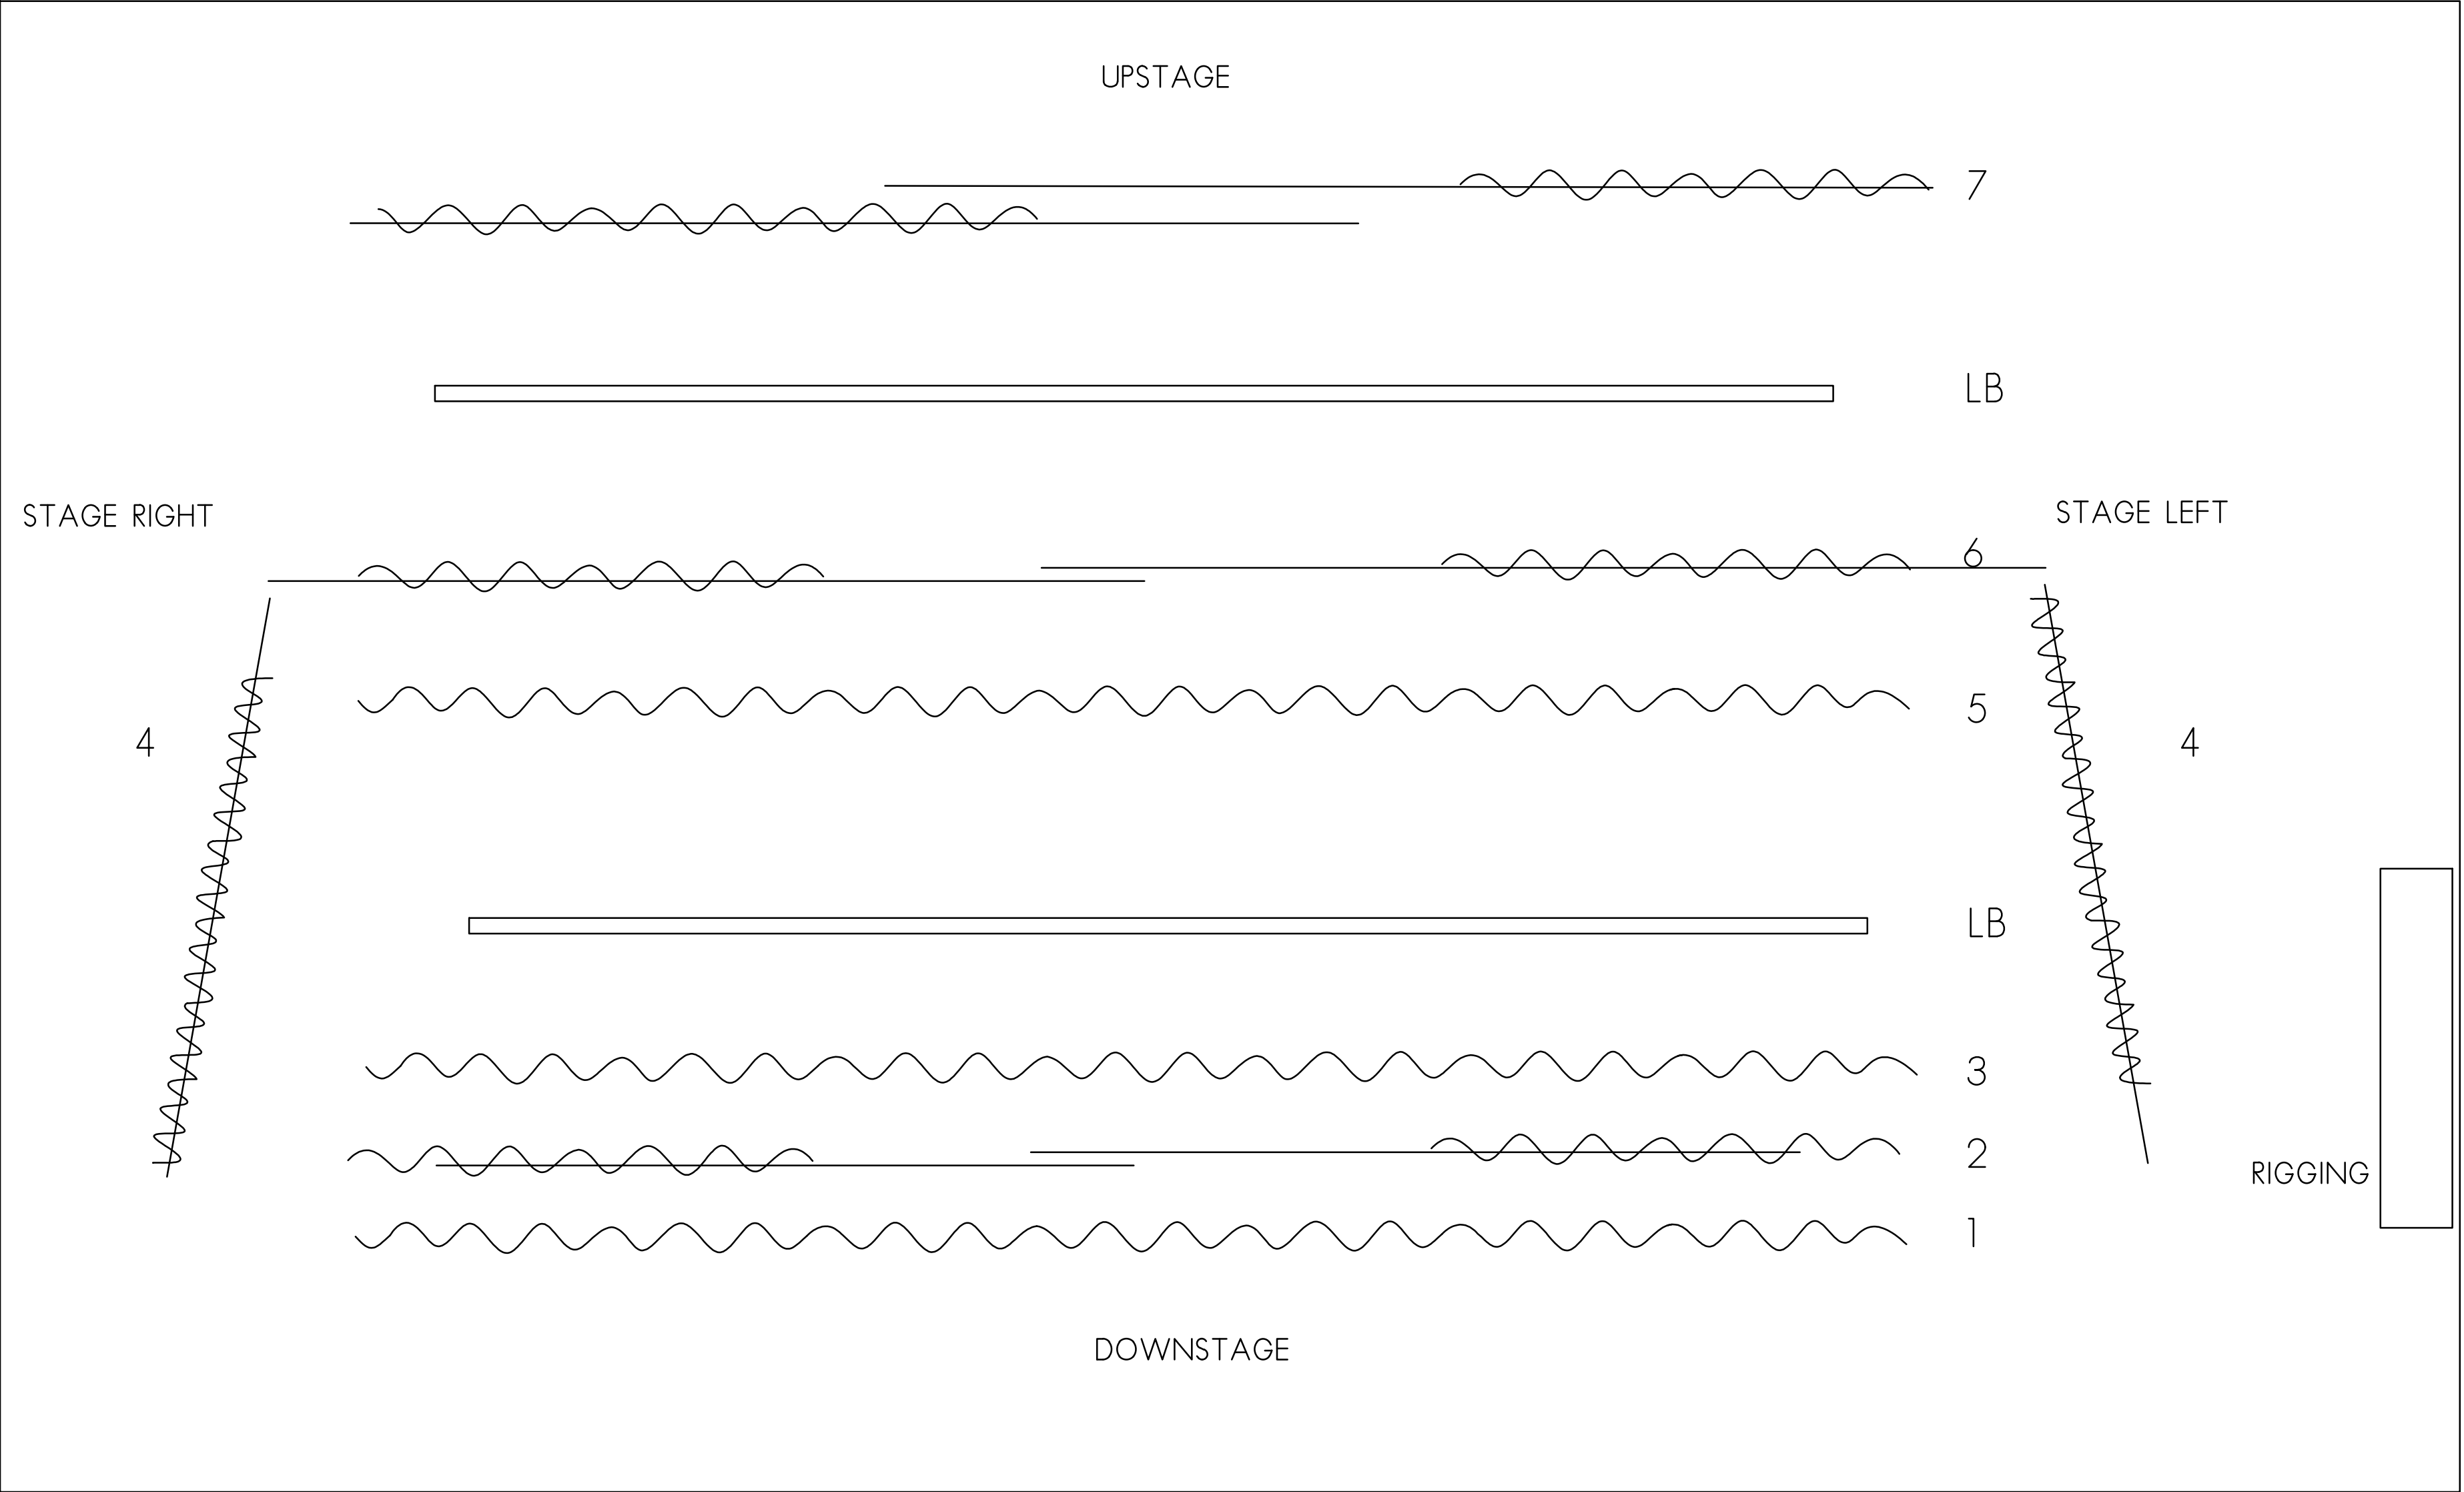


1 STAGE PLAN
SCALE: NO SCALE

CURTAIN SCHEDULE									
ITEM #	TYPE OF CURTAIN	HANG TYPE	FABRIC TYPE	QTY	HEIGHT	WIDTH	FULLNESS	COLOR	NOTES
1	MAIN VALANCE	PIPE	CHARISMA	1	6'-0"	37'-0"	50%	1118 NAVY	1,3
2	MAIN DRAW	TRACK	CHARISMA	2	14'-6"	22'-0"	50%	1118 NAVY	1,3
3	BORDER #1	PIPE	CRESCENT	1	6'-10"	37'-9"	50%	1064 BLACK	1,3
4	SIDE TAB (GERMANS)	TRACK	CRESCENT	2	20'-6"	9'-0"	50%	1064 BLACK	1,3
5	BORDER #2	PIPE	CRESCENT	1	4'-7"	33'-0"	50%	1064 BLACK	1,3
6	MID-STAGE DRAW	TRACK	CRESCENT	2	15'-1"	20'-0"	50%	1064 BLACK	1,3,B
7	REAR-STAGE DRAW	TRACK	CRESCENT	2	20'-9"	22'-6"	50%	1064 BLACK	1,3
LB	LIGHT BAR								2


2 NEW CURTAIN SCHEDULE
SCALE: NO SCALE

GENERAL SCHEDULE NOTES:
1. REPLACE ALL CURTAINS. REMOVE AND DISCARD EXISTING.
2. TO REMAIN.
3. PROTECT ALL EXISTING FINISHES AND FURNISHINGS FROM CONSTRUCTION WORK.

RIGGING SCHEDULE:
A. REPLACE ALL DEAD HUNG RIGGING COMPONENTS WITH LOAD RATED HARDWARE.
B. REPLACE CURTAIN TRACKS AND EXTEND THE MIDSTAGE DRAW TRACK 3'-0" AND MOVE DOWNSTAGE 2'-0".
C. REPLACE PIPE BATTENS.
D. TRIM THE TWO LINESETS FOR BORDER CURTAINS THAT ARE ON SANDBAGS.
E. RE-TERMINATE CABLE ON HAND-CRANK WINCH TO THE STAGE ELECTRIC.
F. PROVIDE TRAINING FOR ALL STAFF THAT USE THE THEATER AND RIGGING SYSTEM.

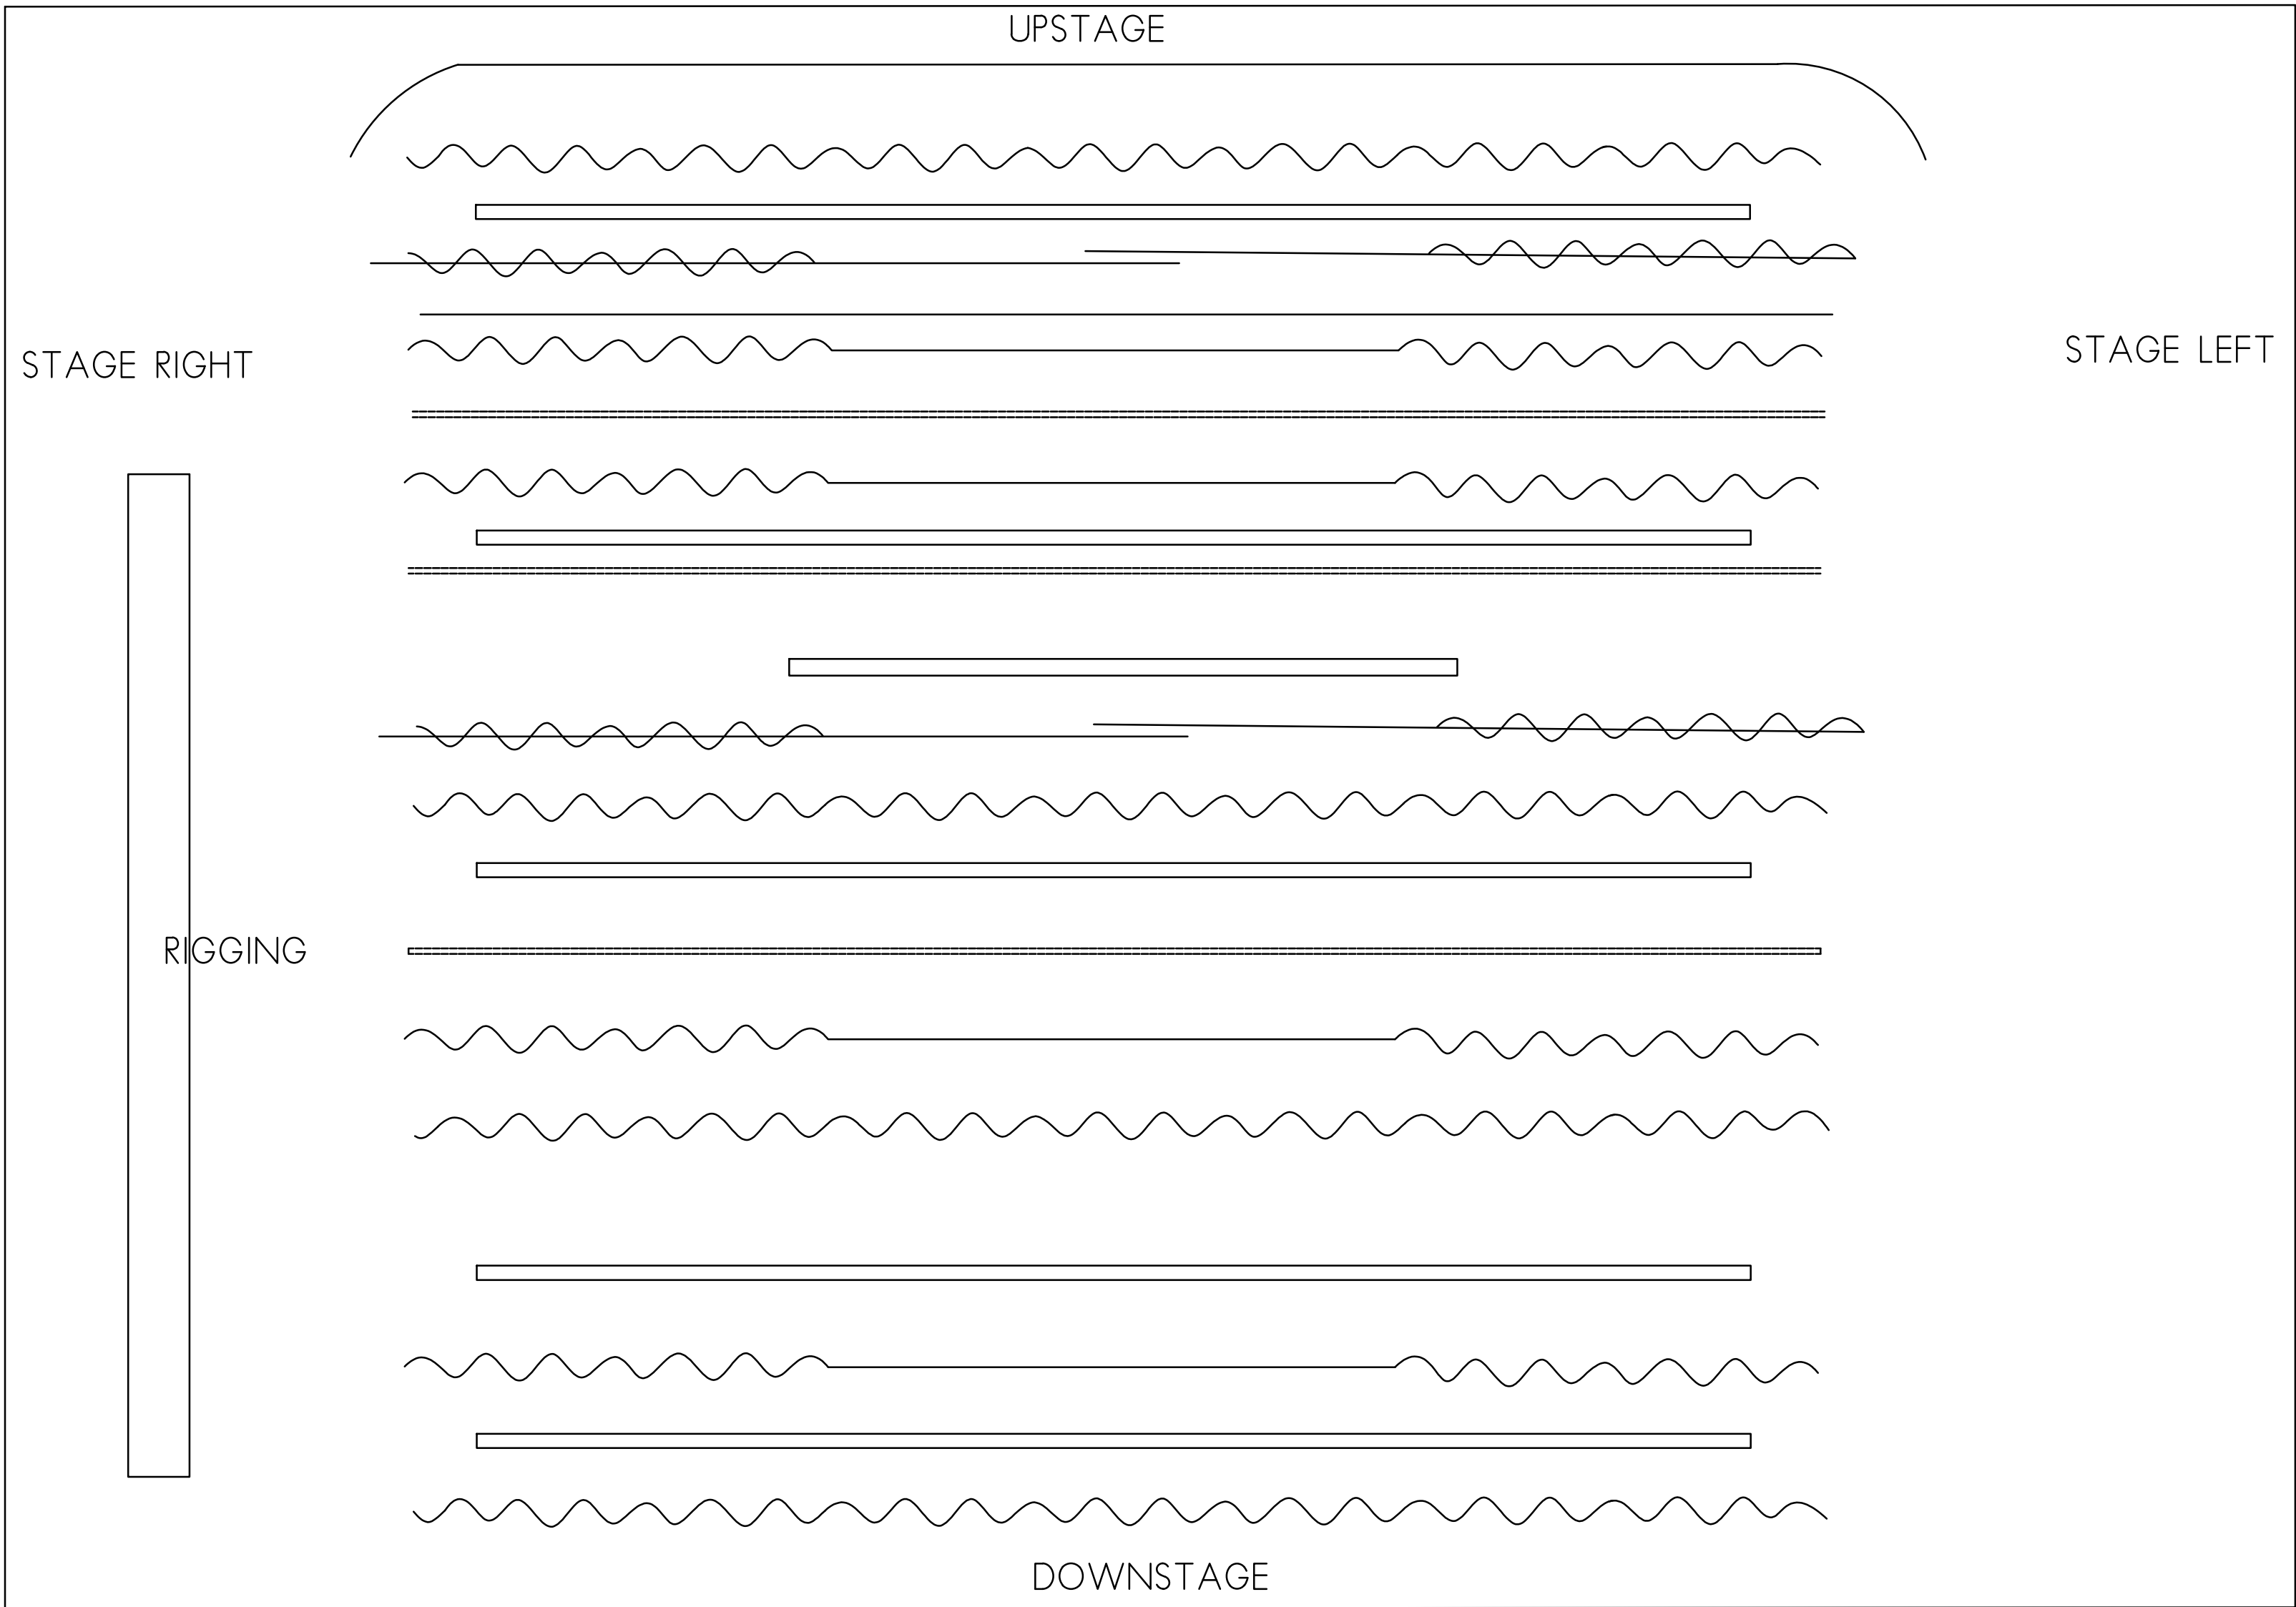

1 EXISTING PLAN
SCALE: NO SCALE

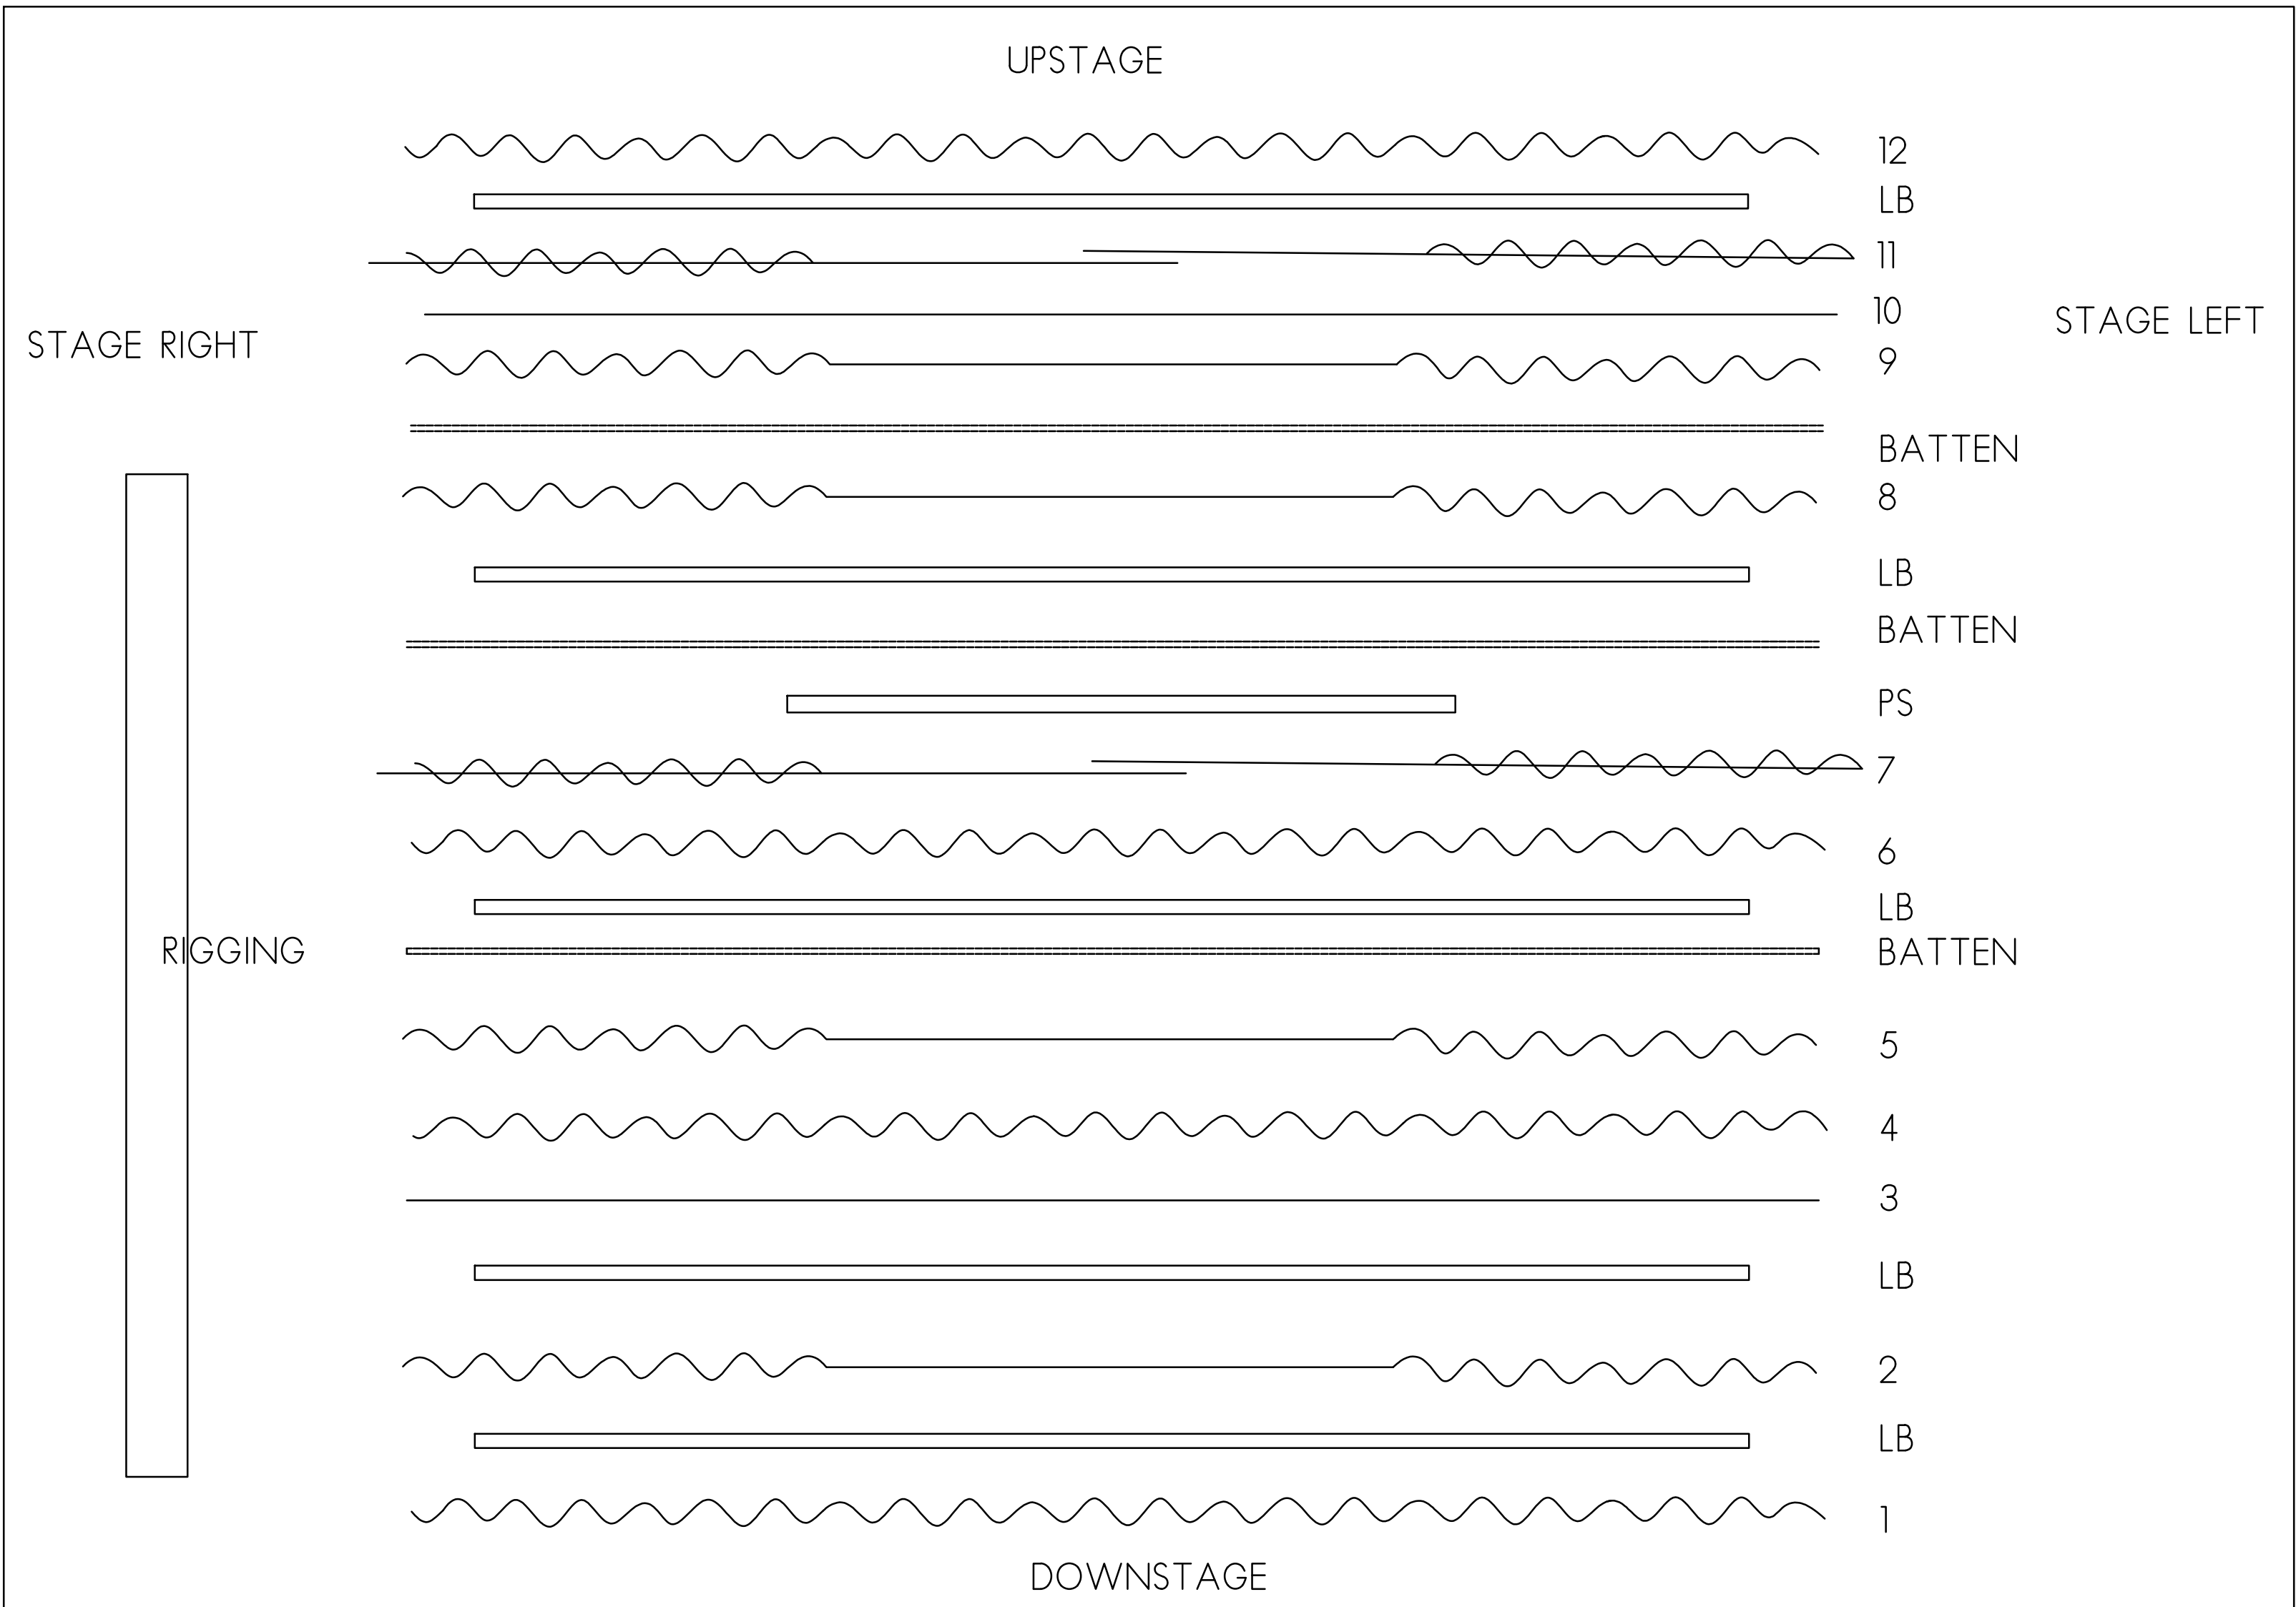

2 NEW PLAN
SCALE: NO SCALE

CURTAIN SCHEDULE									
ITEM #	TYPE OF CURTAIN	HANG TYPE	FABRIC TYPE	QTY	HEIGHT	WIDTH	FULLNESS	COLOR	NOTES
1	MAIN VALANCE	PIPE	CHARISMA	1	5'-4"	47'-6"	50%	1064 BLACK	1,4
2	MAIN DRAW	TRACK	CHARISMA	2	18'-7"	27'-0"	50%	1064 BLACK	1,4
3	SCRIM #1	PIPE	SHARKSTOOTH	1	19'-9"	50'-0"	50%	BLACK	1,4
4	BORDER #1	PIPE	CRESCENT	1	5'-0"	50'-0"	50%	1064 BLACK	1,4
5	LEG #2	PIPE	CRESCENT	2	20'-0"	6'-0"	50%	1064 BLACK	1,4
6	BORDER #2	PIPE	CRESCENT	1	5'-0"	50'-0"	50%	1064 BLACK	1,4
7	MID-STAGE DRAW	TRACK	CRESCENT	2	20'-0"	26'-0"	50%	1064 BLACK	1,4
8	LEG #3	PIPE	CRESCENT	2	20'-0"	6'-0"	50%	1064 BLACK	1,4
9	LEG #4	PIPE	CRESCENT	2	20'-0"	6'-0"	50%	1064 BLACK	1,4
10	SCRIM #2	PIPE	SHARKSTOOTH	1	19'-9"	50'-0"	50%	WHITE	1,2,4
11	REAR-STAGE DRAW	PIPE	CRESCENT	2	20'-0"	26'-0"	50%	1064 BLACK	1,4
12	CYCLORAMA-STRAIGHT	PIPE	POLY CYC	1	19'-9"	60'-0"	FLAT	MUSLIN	1,4
13	CYCLORAMA-CURVED	PIPE	-	1	-	-	-	-	4,C
PS	PROJECTION SCREEN								3
LB	LIGHT BAR								3

- GENERAL SCHEDULE NOTES:**
1. REPLACE ALL CURTAINS. REMOVE AND DISCARD EXISTING.
 2. BASE BID: ADD WHITE SCRIM CURTAIN ON EXISTING RIGGING. COORDINATE LOCATION WITH OWNER.
 3. TO REMAIN.
 4. PROTECT ALL EXISTING FINISHES AND FURNISHINGS FROM CONSTRUCTION WORK.
 5. DRAPERIES ON WINDOWS AT ALL LOCATIONS AT UPPER BALCONY TO REMAIN.

- RIGGING SCHEDULE:**
- A. REPLACE TRIM CHAIN WITH LOAD RATED CHAIN AND RE-TERMINATE AIRCRAFT CABLE.
 - B. MOVE BATTEN THAT IS DOWNSTAGE OF THE 4TH ELECTRIC. IT IS TOO CLOSE.
 - C. REMOVE CURVED CYCLORAMA PIPE AND ALL ATTACHED LINES. DISCARD.
 - D. PROVIDE TRAINING FOR ALL STAFF THAT USE THE THEATER AND RIGGING SYSTEM.

3 NEW CURTAIN SCHEDULE
SCALE: NO SCALE

WEST MIDDLE SCHOOL
STAGE PLAN AND CURTAIN SCHEDULE

SCALE: NO SCALE

A PROJECT FOR ROCKFORD PUBLIC SCHOOL DISTRICT 205
THEATER RIGGING/STAGE CURTAINS
ROCKFORD, ILLINOIS



COPYRIGHT 2017
All drawn and written information appearing herein shall not be duplicated, disclosed, or otherwise used without the written consent of Larson & Darby Group

DATE: 3-13-2017	ISSUED FOR:	DATE
PROJECT NUMBER 26160	DRAWN JAW	
SHEET NUMBER 15.1	APPROVED CA	

EAST HIGH SCHOOL:	GUILFORD HIGH SCHOOL:	JEFFERSON HIGH SCHOOL
RIGGING SCHEDULE: _____ RIGGING TYPE: SINGLE PURCHASE COUNTER WEIGHT REFER TO SPECIFICATIONS FOR ADDITIONAL MATERIAL INFORMATION AND DIRECTIVES 1. WIRE ROPE AND TERMINATIONS: A. REMOVE ALL AIRCRAFT WIRE ROPE CABLE ON THEATRICAL RIGGING SYSTEM. B. REPLACE AIRCRAFT CABLE WITH 7X19 GALVANIZED AIRCRAFT CABLE. C. TERMINATE USING COPPER OVAL SWAGES, THIMBLES, TRIM CHAIN AND 1/4" SCREW PIN ANCHOR SHACKLES. D. TRIM CHAIN MUST BE 7MM THEATRICAL RIGGING CHAIN. BASIS OF DESIGN: PEERLESS CHAIN. E. ALL HARDWARE MUST BE LOAD RATED. F. RE-INSTALL EXISTING PIPE BATTENS. 2. HAND LINE: A. OLD HEMP LINE. REMOVE AND REPLACE AS PER CONTRACT.	RIGGING SCHEDULE: _____ RIGGING TYPE: SINGLE PURCHASE COUNTER WEIGHT REFER TO SPECIFICATIONS FOR ADDITIONAL MATERIAL INFORMATION AND DIRECTIVES 1. HAND LINE: A. OLD HEMP LINE. REMOVE AND REPLACE AS PER CONTRACT. 2. COUNTERWEIGHT ARBOR: A. REMOVE CRASHED/BENT ARBOR. B. REPLACE WITH ABANDONED ARBOR. 3. RE-ANCHOR GUIDE WIRE ON EXISTING TAB CURRENT 4. REMOVE AND REPLACE BENT CURTAIN TRACK AND PIPE BATTEN.	RIGGING SCHEDULE: _____ RIGGING TYPE: SINGLE PURCHASE COUNTER WEIGHT REFER TO SPECIFICATIONS FOR ADDITIONAL MATERIAL INFORMATION AND DIRECTIVES 1. WIRE ROPE AND TERMINATIONS: A. REMOVE ALL AIRCRAFT WIRE ROPE CABLE ON THEATRICAL RIGGING SYSTEM. B. REPLACE AIRCRAFT CABLE WITH 7X19 GALVANIZED AIRCRAFT CABLE. C. TERMINATE USING COPPER OVAL SWAGES, THIMBLES, TRIM CHAIN AND 1/4" SCREW PIN ANCHOR SHACKLES. D. TRIM CHAIN MUST BE 7MM THEATRICAL RIGGING CHAIN. BASIS OF DESIGN: PEERLESS CHAIN. E. ALL HARDWARE MUST BE LOAD RATED. F. RE-INSTALL EXISTING PIPE BATTENS. 2. HAND LINE: A. OLD HEMP LINE. REMOVE AND REPLACE AS PER CONTRACT. 3. BATTENS: A. LOCATE (3) BENT BATTENS AND REPLACE PER CONTRACT. B. TRIM AND LEVEL ALL OTHER BATTENS.

EAST HIGH SCHOOL
GUILFORD HIGH SCHOOL
JEFFERSON HIGH SCHOOL
RIGGING REPAIRS SCOPE OF WORK


SCALE: _____ NO SCALE

DATE: 3-13-2017	PROJECT NUMBER	SHEET NUMBER
	26160	16.1

ISSUED FOR:	DATE
DRAWN	APPROVED
JAW	CA

COPYRIGHT 2017
All drawn and written information
appearing herein shall not be
reproduced, disclosed, or otherwise
used without the written consent of:
Larson & Darby Group

A PROJECT FOR ROCKFORD PUBLIC SCHOOL DISTRICT 2015
THEATER RIGGING/STAGE CURTAINS
ROCKFORD, ILLINOIS

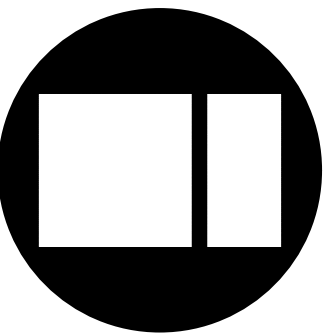

Larson & Darby Group
Architecture Engineering Interiors
Rockford Office - 4049 Herman Ave., Suite 100, Rockford, IL 61107 Tel (815) 984-9739 Fax (815) 225-9627